

Image Understanding for Automatic Human and Machine Separation

Cristina Romero Macias

Queen Mary, University of London

School of Electronic Engineering and Computer Science

Supervisor: Prof. Ebroul Izquierdo

PhD Thesis

Abstract

The research presented in this thesis aims to extend the capabilities of human interaction proofs in order to improve security in web applications and services. The research focuses on developing a more robust and efficient Completely Automated Public Turing test to tell Computers and Human Apart (CAPTCHA) to increase the gap between human recognition and machine recognition. Two main novel approaches are presented, each one of them targeting a different area of human and machine recognition: a character recognition test, and an image recognition test. Along with the novel approaches, a categorisation for the available CAPTCHA methods is also introduced.

The character recognition CAPTCHA is based on the creation of depth perception by using shadows to represent characters. The characters are created by the imaginary shadows produced by a light source, using as a basis the gestalt principle that human beings can perceive whole forms instead of just a collection of simple lines and curves. This approach was developed in two stages: firstly, two dimensional characters, and secondly three-dimensional character models.

The image recognition CAPTCHA is based on the creation of cartoons out of faces. The faces used belong to people in the entertainment business, politicians, and sportsmen. The principal basis of this approach is that face perception is a cognitive process that humans perform easily and with a high rate of success. The process involves the use of face morphing techniques to distort the faces into cartoons, allowing the resulting image to be more robust against machine recognition.

Exhaustive tests on both approaches using OCR software, SIFT image recognition, and face recognition software show an improvement in human recognition rate, whilst preventing robots break through the tests.

Acknowledgements

First of all, I would like to thank Prof. Ebroul Izquierdo for all his support and advice during my PhD degree that have served me as a guide during these years. Also, I would like to thank Dr Prathap Nair and Dr. Krishna Chandramouli for being there to provide advice and help that made progress in my study feasible.

It was a pleasure to work and share joyful moments with many brilliant colleagues in the MMV Group. They helped me not only professionally but also personally making everyday life easier and happier, for which I am extremely thankful.

I would also like to give a special thanks to my friends in London, those who helped to get here in the first place and those I met afterwards: without you, this whole experience would have been half-empty.

Last but not least, I must thank my family and my friends back home, for the unconditional support in the distance that never let me throw in the towel.

Contents

1	Introduction	2
1.1	Contributions	6
1.2	Overview of the thesis	7
2	CAPTCHA concepts	10
2.1	CAPTCHAs	11
2.2	OCR-Based CAPTCHA Methods	15
2.2.1	Reliability of Visual-OCR methods	18
2.3	Visual Non OCR-Based CAPTCHA Methods	20
2.3.1	Reliability and Usability of Non-OCR based CAPTCHA methods	29
2.4	Non Visual CAPTCHA Methods	30
2.4.1	Reliability of Non Visual CAPTCHA Methods	32
2.5	DeCAPTCHAs	33
3	Digital Image Manipulation	38
3.1	Digital Image Warping and Morphing	39
3.1.1	Digital Image Warping	41
3.1.2	Digital Image Morphing	45
3.2	3D Computer Graphics Approach	53
4	Digital Image Recognition	57
4.1	Scale Invariant Features Transform (SIFT)	58
4.1.1	Scale-space extrema detection	59
4.1.2	Accurate keypoint localization	60
4.1.3	Orientation Assignment	62
4.1.4	Local image descriptor	63
4.2	Face Recognition	64
4.2.1	Face Recognition Systems	64
4.2.2	Face Detection	66
4.2.3	Feature Extraction	70

4.2.4	Face Recognition Techniques	72
5	Human Perception and Recognition	78
5.1	Gestalt Psychology	79
5.2	Human Face Perception and Recognition	85
6	Visual Word-Based CAPTCHA	89
6.1	Properties of the Visual Word-Based CAPTCHA based on Shadow Characters .	90
6.2	Visual Word-Based CAPTCHA based on 2D Shadow Characters	92
6.3	Visual Word-Based CAPTCHA based on 3D Character models	94
6.4	Performance analysis of the Visual word-based CAPTCHA approaches	98
6.4.1	Visual Word-Based CAPTCHA based on 2D Shadow Characters	98
6.4.2	Visual Word-Based CAPTCHA based on 3D Character models	105
7	Image Based CAPTCHA	111
7.1	Properties of the Image CAPTCHA based on Face Recognition	112
7.2	Image-Based CAPTCHA based on Face Recognition	114
7.3	Performance analysis of the Image CAPTCHA approach	117
7.3.1	Principle Components Analysis System	118
7.3.2	Linear Discriminant Analysis	120
7.3.3	Volterrafaces Face Recognition System	121
7.3.4	Human Recognition	123
8	Conclusions and Future Work	125
8.1	Conclusions	125
8.2	Future Work	127
	Publications	129
	References	129

Chapter 1

Introduction

In the last two decades, since the commercialisation in the nineties of the Internet, the number of users has grown exponentially until reaching more than 2.2 billion people [77]. This is the result of its popularisation and incorporation into virtually every aspect of modern human life from daily affairs such as education, web search or goods shopping to more professional oriented tasks. Advances in the protocols and the services have brought a wide variety of services. The most important one is the World Wide Web (WWW) that communicates via the Internet a series of resources such as interconnected documents, linked by hyperlinks and URLs.

Since its creation, the Internet has no centralised governance in either policies for access and usage, technological implementation, or management, and it is maintained by each constituent network with its own standards. Due to this fact, security has become an important issue for the users, companies and services. One of the primary sources of abuse on the Internet is spam, that targets electronic messaging services by sending unsolicited bulk messages indiscriminately, especially advertising, among other actions such as instant messaging spam, web search engine spam, spam in blogs, in wikis, in ads, in forums and in social networks, mobile phone messaging spam, and file sharing network spam. It became a serious problem

when the internet was opened up to the general public in the mid-90s. The fact that people have quick and easy access to the internet network made this problem grow exponentially in the following years, reaching proportions of 85% and 90% of all the emails in the world [122].

Besides the huge expansion it has experienced, spam is also a serious problem because of the property rights and the consumed resources. First of all, spam is difficult to get rid off because property rights in several countries are difficult to enforce. Nowadays in Europe, there is a new legislation that tries to reduce the quantity of spam coming from the continent [59]. Secondly, if we talk about resources, spam consumes shared resources such as bandwidth or the load of the servers, or private resources such as money and time. Finally, another serious issue that derives from the existence of spam is that it has become a tool for malware authors and phishers to abuse the Internet.

Malware or malicious software is the term used for a diverse kind of hostile, intrusive, or annoying software that can be used to gather personal or private information, or to harm computer operations. The most common forms of malware are viruses, worms, trojan horses, spyware, adware, and other malicious programs [149]. On the other hand, phishing is a software used to acquire information such as usernames, passwords, and credit card details by disguising itself as a trustworthy entity in an electronic communication or transaction [159] with the aim of stealing money. Spam can be used by malware authors and phishing software through unsolicited commercial e-mails to spread harmful software with the objective of identity theft or even worse; fee fraud. These software programs take advantage of the victim's inexperience with technology or attempt to call on human greed for money (see Figure 1.1).

One of the most effective methods for reducing the amount of spam circulating on Internet and ensuring safety for users is the use of CAPTCHAs. A CAPTCHA is a program that protects internet companies and human users against spam or bots through the generation of grading tests that most humans can pass but current computers cannot [20]. The term CAPTCHA stands for Completely Automated Turing Test to Tell Computers and Humans Apart and was

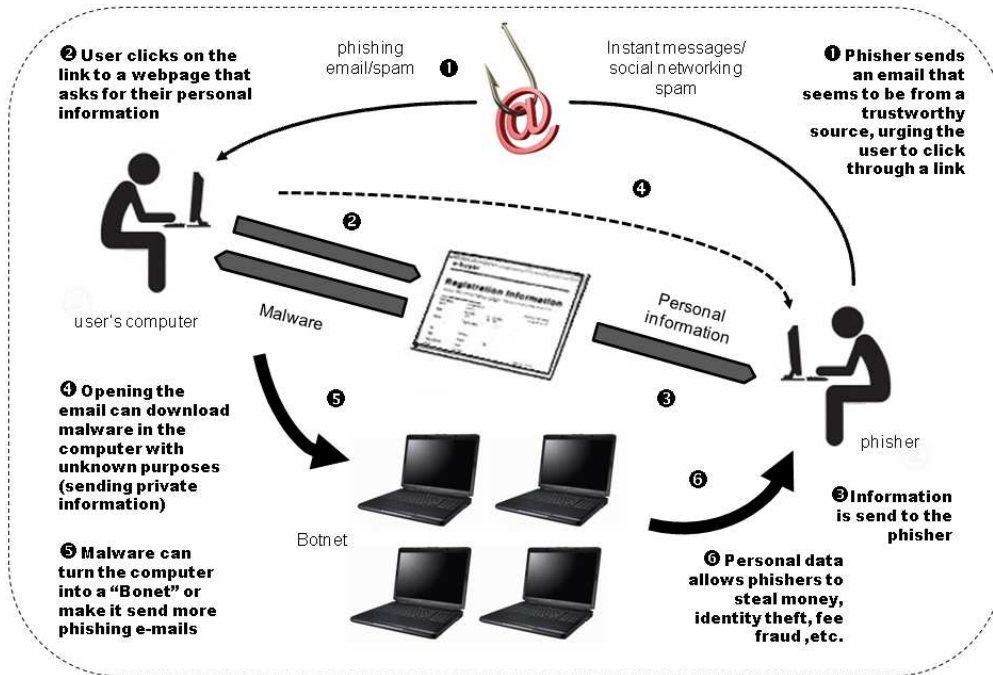


Figure 1.1: Flow diagram of a phishing and malware attack through spam.

firstly coined in 2000 by Luis von Ahn, Manuel Blum, Nicholas Hopper and John Langford of Carnegie Mellon University [188].

The primary application of CAPTCHA is to prevent malicious attacks to the systems by spammers. However, they also serve to protect vulnerable systems, such as Yahoo or Hotmail, against e-mail spam, automated posting to forums, blogs and wikis as a result of commercial interests or harassment. Another important function is bit rate limiting when excessive use of a service is observed.

Nowadays, most of the methods to discriminate humans from computers are based on optical character or image recognition, or sound recognition. In a word-based CAPTCHA, the characters are distorted to make its recognition more difficult for the bots. Among the basic distortions, it can use translation, rotation (clockwise or counterclockwise) and scaling, among others such as sight angle, lighting effects, context, and camouflage [38]. A word-based CAPTCHA test consists on an image that contains distorted and noisy characters or words. To



Figure 1.2: Word-based CAPTCHA extracted from <http://www.captcha.net>.

solve this test, the user has to type the characters presented in the image. Usually, the distortions applied to the image are complicated enough to prevent a robot to recognise the word while allowing humans to do so. An example of common CAPTCHA used in current web applications can be appreciated in Figure 1.2.

An image-based CAPTCHA contains primarily an image that the user has to recognise. Amongst these tests, the user can be asked to implement different kinds of actions; solve a quiz, match symbols, recognise faces, etc. Usually, the images do not appear straightforwardly, instead they can contain warping, occlusion or lighting effects to avoid being recognised by machines. The last type is a sound-based CAPTCHA, which was implemented in the first place for those users that cannot solve visual CAPTCHAs due to an impairment. The test presents an audio file that contains words, letters, or numbers, mixed with background noise, that the user has to type correctly.

Even though there are many CAPTCHA methods available to prevent spam circulating, there are many researchers that have developed techniques to break through them [70, 130, 131, 161] since it means a technological advance in machine learning. Additionally, companies have exploited the fact that users find the tests annoying to create commercial DeCAPTCHAs to break the CAPTCHA tests automatically, without the direct intervention of the users. Due to these facts and the greed of spammers, most of the current tests are becoming obsolete.

In this thesis, the major motivation was the creation of advanced software tools that enables separation of humans and machines in an automated environment and increases the gap of what humans can recognise and machines cannot. The targeted strategies have exploited extremely difficult tasks related to image understanding and human perception. These objectives were established in order to prevent all the security breaches produced by spam and other forms of attack, which are also caused by the inexperience of using computer technology by the majority of users. The primary contributions of this thesis are the development of two efficient and robust CAPTCHA approaches and a categorisation for the current CAPTCHA tests.

1.1 Contributions

For the Visual-word based CAPTCHA:

- identification of the issues on the current word-based CAPTCHAs;
- development of a new type of characters based on 3D objects with 3D boundaries delimited by shadows [150];
- design of an efficient algorithm to optimise the distortions applied to the characters and ensure safety against possible external attacks to break the code [150];
- exhaustive experiments to test the efficiency of the approach and improve the human friendliness regarding the current approaches available [150].

For the Image-based CAPTCHA:

- identification of the issues on the current image-based CAPTCHAs;
- development of a database of faces of well known people and a second database with cartoons and animals to create a final image that is the result of the morphing between a selected image from each database [151];

- design of an efficient algorithm to optimise the morphing between images and ensure safety against possible external attacks to break the code [151];
- exhaustive experiments to test the robustness of the approach and improve the human friendliness regarding the current approaches available [151].

Finally, the categorisation gives a classification for every kind of test available and for future techniques since it goes from three general branches to a subclassification that can be enlarge if necessary.

1.2 Overview of the thesis

This thesis has been organised in a self-contained manner. The initial chapter presents the fundamental aspects of the addressed technology and the corresponding state of the art, the following three chapters present the techniques used to develop the approaches presented in the thesis. The subsequent two chapters present the proposed approaches, fully explaining the algorithms and the results obtained. The last chapter concludes the work, presenting the conclusions and considerations for future research. This thesis is organised as follows:

Following the introductory chapter, Chapter 2 presents an overview of CAPTCHA methods, as well as a survey of the available CAPTCHA tests. Important evaluation concepts, such as efficiency and robustness, and human friendliness, are explained, as they will be important in the later chapters. Also, several well-known commercial and published CAPTCHAs are presented along with one of the contributions of the thesis; a categorisation of the CAPTCHAs.

Chapter 3 summarises the basic concepts in digital image manipulation used to create visual CAPTCHA tests. Firstly, the digital image warping and morphing tools are presented, which are used to create the pertinent distortions for both approaches. Additionally, a 3D computer graphics study is introduced, since it will play a major role in the development of the new con-

cepts that differentiate the new CAPTCHA tests presented in this thesis with the ones currently available.

In Chapter 4 the digital image recognition tools are presented. These tools are used to evaluate the efficiency and robustness of the approaches created. For the OCR-based CAPTCHA, the SIFT tool is explained, since it will be used to evaluate the grade of machine recognition for characters. It also presents the state-of-the-art study in face recognition techniques, because different techniques will be used to measure the capacity of machines to recognise the distorted faces created by the image-based CAPTCHA.

Human perception and recognition theories are the focus of Chapter 5. The main aim of this chapter is the evaluation of the human friendliness of the approaches presented in this thesis. Human perception theories are explained in the two sections that the chapter is divided. The first section focuses on Gestalt psychology, which defines a branch of psychology than explains how human beings perceive objects when they are incomplete, which is used to create the OCR-based CAPTCHA. The second section focuses on face perception and recognition with the aim of creating a good interactive image-based CAPTCHA.

Chapter 6 introduces the first approach: the visual word-based CAPTCHA. The developed scheme introduces a new concept in the creation of a word-based CAPTCHA: the use of shadows to represent characters. Additionally, it presents both the experiments made to evaluate the efficiency and robustness, and the human friendliness and the results for these experiments, along with a complexity analysis of the test and a brief discussion of these results.

Chapter 7 focuses on the second approach, the image-based CAPTCHA. This scheme is developed with the aim of creating a more interactive and secure test. It uses distorted faces of well known people from diverse cultural sectors, such as politics, sports, cinematographic industry, etc. Following the lead of the first approach, it also presents both the experiments made to evaluate the efficiency and robustness, and the human friendliness and the results for

these experiments, along with a complexity analysis of the test and a brief discussion of these results.

The conclusions are summarised in Chapter 8. The list of author's publications is given at the end of the thesis along with the references used.

Chapter 8

Conclusions and Future Work

8.1 Conclusions

The aim of the research presented in this thesis was to increase the gap of what humans can recognise and machines cannot. Additionally, the creation of more robust and efficient novel methods was targeted. The main focus was centred on creating CAPTCHA tests using human psychology and universal common knowledge. The first step towards the developed methods was to analyse the current approaches and distinguish their weaknesses and possible ways to improve them. This includes a research of computer vision software that allows machines to break through the tests.

The research on the current methods available uncovered the necessity of a classification to categorise the algorithms by the computer vision techniques used and by human aptitudes. For the classification, three main categories have been considered: OCR-based methods, Visual non OCR-Based methods and non Visual methods. These categories have been divided into subcategories for a more accurate classification. Along with the sub-categorisation, an extensive analysis of the available methods and their reliability was presented in the thesis, reaching the following conclusions:

OCR-Based methods were the first CAPTCHAs to emerge. They had a quick expansion to many different web applications as well as many prototypes. Along with the expansion, several different programs to break through them arose which provoked an increase in difficulty in the tests. Nowadays, most users find them annoying and time consuming.

- Visual non OCR-Based methods emerged to explore diverse sides of CAPTCHA methods. At the beginning they focused on solving quizzes or matching problems but rapidly expanded to many other areas. Also, their reliability increased with time, going from easy to break to more secure than OCR-Based methods. Their diversity makes them more human friendly and less time consuming.

- Non visual methods arose as an alternative to visual methods due to some visual impairments users may have. They weren't as successful as the others due to their difficulty and language restrictions.

The second step in this research was the development of two novel methods to prevent spam and malicious software to break through web applications and increase security when logging in. The first method uses shadows to represent characters. The shadow boundaries were chosen to develop the fact that humans can easily recognise objects and characters only by the shadows but machines cannot. The distortions applied to the images are based upon geometric transformations that include affine and perspective transformations. The approach based on 2D shadow characters shows an improvement in efficiency and robustness over the actual CAPTCHAs. The visual word-based CAPTCHA using 3D models is based upon lighting effects to create 3D shadow boundaries. The performance of this algorithm highlights that using 3D models yields better results in terms of efficiency and robustness. These tests are more difficult to solve for computer vision techniques but they still remain easy for humans. In this method, one of the challenges faced was that people visually impaired or with mental illness as dyslexia should be able to recognise the characters. However, it is also necessary to make the tests difficult enough for the machines not to break through them.

Humans can easily recognise cartoons or sketches from famous people, even if they are rotated or manipulated. A machine cannot recognise this type of image because it does the matching by pattern or feature extraction and the original one is very different. The second method uses distorted faces of world famous people to create a test to secure web applications. The main basis for the development of this method was the innate ability of human beings to recognise faces. The distortions applied to the face images are based upon a feature-based morphing process with multiple pairs of lines. The performance of this algorithm highlights two facts; firstly, using distorted faces as a test increments the efficiency and robustness of the previous approaches and secondly, it increments the difficulty for face recognition techniques to break through our system.

8.2 Future Work

In addition to the developed work, there are some challenges that have appeared while developing the second approach. The main focus addresses the level of distortions applied to the faces. The main reason is that a high distortion factor can make the faces indistinguishable and a low rate can make it too easy for the face recognition system to break through the test. To measure the appropriate levels of morphing, different variables and factors were taken into account; cross-dissolve factor range, human recognition capabilities and the cartoon or animal used in the destination image. Another important factor to take into account was that people with prosopagnosia have more difficulties when recognising and distinguishing human faces, and even though there is nothing much that can be changed in this approach, the only alternative to help the human users with this problem is which kind of faces can be used.

Practical realisations of methods presented in this thesis have enabled a high efficiency and robustness in the OCR-based CAPTCHA approach and the Image-based CAPTCHA approach. On the other hand, these realisations have also uncovered several interesting topics for future research, as well as some issues that have not been yet adequately resolved. These include:

-Since human and machine recognition depends on the diverse distortions applied, it is necessary an optimisation of the warping and morphing techniques by improving the algorithms and creating smoother transitions for the original image to the distorted one. New morphing techniques should also be taken into consideration.

-Evaluation study of face recognition by human users depending on geographical locations. Knowing the cultural background and social knowledge is an important factor to increase the success rate by users. Also, it will be necessary to update the database depending on the latest celebrities or personalities that are famous at that moment.

-Although the developed methods can prevent machines to successfully pass the current CAPTCHAs, as the computer vision techniques research advances similarly the CAPTCHAs should improve. Therefore, the techniques applied and the human psychology used should be further studied.

Publications

- [1] E.Izquierdo K.Vaiapury, C.Romero Macias. A new integrated methodology for 3d discrepancy checking and measurement in assembly. This is a article for 3DTVCON 2012., 2012.
- [2] C. Romero Macias and E. Izquierdo. Visual word-based captcha using 3d characters. In *3rd International Conference on Crime Detection and Prevention (ICDP 2009)*, pages 1–5. IET, 2009.
- [3] C. Romero Macias and E. Izquierdo. Image captcha based on distorted faces. In *4th International Conference on Imaging for Crime Detection and Prevention (ICDP 2011)*, pages 1–6. IET, 2011.
- [4] C. Romero Macias and E. Izquierdo. A survey of captchas: Are computers getting the better of us? This is a journal for ACM Surveys., 2011.

References

- [5] AltaVista. Altavista's "add-url" site, protected by the earliest known captcha. <http://altavista.com/sites/addurl/newurl>, 1997.
- [6] N. Arad, N. Dyn, D. Reissfeld, and Y. Yeshurun. Image warping by radial basis functions: Application to facial expressions. *CVGIP-Graphical Models and Image Processing*, 56(2):161–172, 1994.
- [7] E. Bagherian and R.W.O.K. Rahmat. Facial feature extraction for face recognition: a review. In *International Symposium on Information Technology, ITSIM 2008*, volume 2, pages 1–9. IEEE, 2008.
- [8] H.S. BAIRD and J.L. BENTLEY. Implicit captchas. In *SPIE proceedings series*, pages 191–196. Society of Photo-Optical Instrumentation Engineers, 2005.
- [9] H.S. Baird and D.P. Lopresti. *Human interactive proofs: second international workshop, HIP 2005, Bethlehem, PA, USA, May 19-20, 2005: proceedings*, volume 3517. Springer Verlag, May 2005.
- [10] H.S. Baird, M.A. Moll, and S.Y. Wang. Scattertype: A legible but hard-to-segment captcha. In *Eighth International Conference on Document Analysis and Recognition*, pages 935–939. IEEE, 2005.

- [11] H.S. Baird and K. Popat. Human interactive proofs and document image analysis. In *Proceedings of the 5th International Workshop on Document Analysis Systems V*, pages 507–518. Springer-Verlag, 2002.
- [12] M.S. Bartlett, J.R. Movellan, and T.J. Sejnowski. Face recognition by independent component analysis. *IEEE Transactions on Neural Networks*, 13(6):1450–1464, 2002.
- [13] R. Beede. Analysis of recaptcha effectiveness. http://www.rodneybeede.com/reCAPTCHA_weakened.html, 2010.
- [14] T. Beier and S. Neely. Feature-based image metamorphosis. *Computer Graphics*, 26(2):35–42, 1992.
- [15] P.N. Belhumeur, J.P. Hespanha, and D.J. Kriegman. Eigenfaces vs. fisherfaces: Recognition using class specific linear projection. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 19(7):711–720, 1997.
- [16] R. Bergmair and S. Katzenbeisser. Towards human interactive proofs in the text-domain. *Information Security*, pages 257–267, 2004.
- [17] R. Beveridge and B. Draper. CSU Face Identification Evaluation System. <http://www.cs.colostate.edu/evalfacerec/index10.php>, 2010.
- [18] M. Bichsel. *Strategies of robust object recognition for the automatic identification of human faces*. PhD thesis, ETH, Zurich, 1991.
- [19] J.P. Bigham and A.C. Cavender. Evaluating existing audio captchas and an interface optimized for non-visual use. In *Proceedings of the 27th international conference on Human factors in computing systems*, pages 1829–1838. ACM, 2009.
- [20] M. Blum, LA Von Ahn, J. Langford, and N. Hopper. The captcha project, “completely automatic public turing test to tell computers and humans apart”. *School of Computer Science, Carnegie-Mellon University*, <http://www.captcha.net>, 2000.
- [21] B. Bocian. *Fritz Perls in Berlin, 1893-1933: Expressionismus, Psychoanalyse, Judentum*. EHP Verlag Andreas Kohlhage, Bergisch Gladbach, 2010.
- [22] W.J. Bouknight. A procedure for generation of three-dimensional half-toned computer graphics presentations. *Communications of the ACM*, 13(9):527–536, 1970.
- [23] J. Brooke, N. Bevan, F. Brigham, S. Harker, and D. Youmans. Usability statements and standardisation: Work in progress in iso. In *Proceedings of the IFIP TC13 Third International Conference on Human-Computer Interaction*, pages 357–361. North-Holland

- Publishing Co., 1990.
- [24] M. Brown and D.G. Lowe. Invariant features from interest point groups. In *British Machine Vision Conference*, pages 656–665. British Machine Vision Association, 2002.
 - [25] V. Bruce, P.R. Green, and M.A. Georgeson. *Visual perception*. Psychology Press, 1996.
 - [26] V. Bruce and A. Young. Understanding face recognition. *British journal of psychology*, 77(3):305–327, 1986.
 - [27] R. Brunelli and T. Poggio. Face recognition: Features versus templates. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 15(10):1042–1052, 2002.
 - [28] E. Bursztein, R. Beauxis, H. Paskov, D. Perito, C. Fabry, and J. Mitchell. The failure of noise-based non-continuous audio captchas. In *IEEE Symposium on Security and Privacy (SP)*, pages 19–31. IEEE, 2011.
 - [29] E. Bursztein and S. Bethard. Decaptcha: breaking 75% of ebay audio captchas. In *Proceedings of the 3rd USENIX conference on Offensive technologies*, pages 8–8. USENIX Association, 2009.
 - [30] E. Bursztein, S. Bethard, C. Fabry, J.C. Mitchell, and D. Jurafsky. How good are humans at solving captchas? a large scale evaluation. In *2010 IEEE Symposium on Security and Privacy*, pages 399–413. IEEE, 2010.
 - [31] E. Bursztein, M. Martin, and J. Mitchell. Text-based captcha strengths and weaknesses. In *Proceedings of the 18th ACM conference on Computer and communications security*, pages 125–138. ACM, 2011.
 - [32] P. Campadelli, R. Lanzarotti, and G. Lipori. Automatic facial feature extraction for face recognition. *Face Recognition*, pages 31–58, 2007.
 - [33] S. Chakrabarti and M. Singbal. Password-based authentication: Preventing dictionary attacks. *IEEE Computer*, 40(6):68–74, 2007.
 - [34] T.Y. Chan. Using a test-to-speech synthesizer to generate a reverse turing test. In *Tools with Artificial Intelligence, 2003. Proceedings. 15th IEEE International Conference on*, pages 226–232. IEEE, 2003.
 - [35] M. Chandrasekaran, R. Chinchani, and S. Upadhyaya. Phoney: Mimicking user response to detect phishing attacks. In *Proceedings of the 2006 International Symposium on a World of Wireless, Mobile and Multimedia Networks*, pages 668–672. IEEE, 2006.

- [36] T.C. Chang, T.S. Huang, and C. Novak. Facial feature extraction from color images. In *Pattern Recognition, 1994. Vol. 2-Conference B: Computer Vision & Image Processing., Proceedings of the 12th IAPR International. Conference on*, volume 2, pages 39–43. IEEE, 1994.
- [37] SK Chaudhari, AR Deshpande, SB Bendale, and RV Kotian. 3d drag-n-drop captcha enhanced security through captcha. In *Proceedings of the International Conference & Workshop on Emerging Trends in Technology*, pages 598–601. ACM, 2011.
- [38] K. Chellapilla, K. Larson, P. Simard, and M. Czerwinski. Computers beat humans at single character recognition in reading based human interaction proofs (hips). In *Proceedings of the Second Conference on Email and Anti-Spam*, pages 21–22, 2005.
- [39] K. Chellapilla, K. Larson, P. Simard, and M. Czerwinski. Designing human friendly human interaction proofs (hips). In *Proceedings of the SIGCHI conference on Human factors in computing systems*, pages 711–720. ACM, 2005.
- [40] K. Chellapilla and P. Simard. Using machine learning to break visual human interaction proofs (hips). In *In Proceedings of the Advances in Neural Information Processing Systems (NIPS) Conference*, volume 17. MIT Press, 2004.
- [41] M. Chew and H.S. Baird. Baffletext: a human interactive proof. In *In Proc., 10th IS&T/SPIE Document Recognition & Retrieval Conference*, pages 305–316. Citeseer, 2003.
- [42] M. Chew and J. Tygar. Image recognition captchas. *Information Security*, pages 268–279, 2004.
- [43] M. Chew and J. Tygar. Collaborative filtering captchas. *Human Interactive Proofs*, pages 95–110, 2005.
- [44] A.L. Coates, H.S. Baird, and RJ Faternan. Pessimial print: a reverse Turing test. In *Sixth International Conference on Document Analysis and Recognition. Proceedings.*, pages 1154–1158. IEEE, 2001.
- [45] T. Cootes, G. Edwards, and C. Taylor. Active appearance models. *Computer Vision ECCV98*, pages 484–498, 1998.
- [46] I.J. Cox, J. Ghosn, and P.N. Yianilos. Feature-based face recognition using mixture-distance. In *Computer Vision and Pattern Recognition, 1996. Proceedings CVPR'96, 1996 IEEE Computer Society Conference on*, pages 209–216. IEEE, 1996.

- [47] I. Craw, D. Tock, and A. Bennett. Finding face features. In *Computer Vision ECCV'92*, pages 92–96. Springer, 1992.
- [48] J.S. Cui, L.J. Wang, J.T. Mei, D. Zhang, X. Wang, Y. Peng, and W.Z. Zhang. Captcha design based on moving object recognition problem. In *3rd International Conference on Information Sciences and Interaction Sciences (ICIS)*, pages 158–162. IEEE, 2010.
- [49] Y. Dai and Y. Nakano. Face-texture model based on sglcd and its application in face detection in a color scene. *Pattern recognition*, 29(6):1007–1017, 1996.
- [50] M. Dailey and C. Namprempe. A text graphics character captcha for password authentication. In *TENCON 2004. 2004 IEEE Region 10 Conference*, pages 45–48. IEEE, 2004.
- [51] R. Datta, J. Li, and J.Z. Wang. Imagination: a robust image-based captcha generation system. In *Proceedings of the 13th annual ACM international conference on Multimedia*, pages 331–334. ACM, 2005.
- [52] decaptchablog.com. List of best decaptcher (or decaptcha) services. <http://decaptchablog.com/>, March 2011.
- [53] A. Desai and P. Patadia. Drag and drop: A better approach to captcha. In *2009 Annual IEEE India Conference (INDICON)*, pages 1–4. IEEE, 2009.
- [54] R. Dhamija and A. Perrig. Dj vu: A user study using images for authentication. In *Proceedings of the 9th conference on USENIX Security Symposium-Volume 9*, pages 4–4. USENIX Association, 2000.
- [55] R. Doyle. Image-based captcha with jaci. <http://ryandoyle.net/devel/jaci/>, 2009.
- [56] W. Ellis. A source book of gestalt psychology. *A source book of Gestalt psychology*, pages 71–88, 1938.
- [57] J. Elson, J.R. Douceur, J. Howell, and J. Saul. Asirra: a captcha that exploits interest-aligned manual image categorization. In *Proceedings of ACM CCS*, pages 331–334. ACM, 2007.
- [58] K. Etemad and R. Chellappa. Discriminant analysis for recognition of human face images. *Journal of the Optical Society of America A, JOSAA*, 14(8):1724–1733, 1997.
- [59] Europa.eu. Data protection: "junk" e-mail costs internet users 10 billion a year worldwide - commission study. <http://europa.eu/rapid/>, 2001.

- [60] D.E. Everhart, J.L. Shucard, T. Quatrin, and D.W. Shucard. Sex-related differences in event-related potentials, face recognition, and facial affect processing in prepubertal children. *Neuropsychology*, 15(3):329–341, 2001.
- [61] Facebook. Facebook social captcha. <http://www.facebook.com>, 2011.
- [62] FERET. Face recognition vendor test. <http://www.frvt.org/>, 2006.
- [63] Paul Festa. spam-bot tests flunk the blind, cnet news.com. <http://www.news.com/2100-1032-1022814.html>, July 2, 2003.
- [64] I. Fischer and T. Herfet. Visual captchas for document authentication. In *IEEE 8th Workshop on Multimedia Signal Processing*, pages 471–474. IEEE, 2006.
- [65] H. Gao, H. Liu, D. Yao, X. Liu, and U. Aickelin. An audio captcha to distinguish humans from computers. In *Third International Symposium on Electronic Commerce and Security (ISECS)*, pages 265–269. IEEE, 2010.
- [66] Y. Gao and M.K.H. Leung. Face recognition using line edge map. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 24(6):764–779, 2002.
- [67] I. Gauthier and M.J. Tarr. Becoming a “Greeble” expert: exploring mechanisms for face recognition. *Vision Research*, 37(12):1673–1682, 1997.
- [68] P.B. Godfrey. Text-based captcha algorithms. 2002.
- [69] A.J. Goldstein, L.D. Harmon, and A.B. Lesk. Identification of human faces. *Proceedings of the IEEE*, 59(5):748–760, 2005.
- [70] P. Golle. Machine learning attacks against the asirra captcha. In *Proceedings of the 15th ACM conference on Computer and communications security*, pages 535–542. ACM, 2008.
- [71] P. Golle and N. Ducheneaut. Preventing bots from playing online games. *Computers in Entertainment (CIE)*, 3(3):3–3, 2005.
- [72] J. Gomes. *Warping and morphing of graphical objects*, volume 1. Morgan Kaufmann, 1999.
- [73] J.T. Goodman and R. Rounthwaite. Stopping outgoing spam. In *Proceedings of the 5th ACM conference on Electronic Commerce*, pages 30–39. ACM, 2004.
- [74] C.M. Goral, K.E. Torrance, D.P. Greenberg, and B. Battaile. Modeling the interaction of light between diffuse surfaces. In *ACM SIGGRAPH Computer Graphics*, volume 18,

- pages 213–222. ACM, 1984.
- [75] R. Gossweiler, M. Kamvar, and S. Baluja. What’s up captcha?: a captcha based on image orientation. In *Proceedings of the 18th international conference on World wide web*, pages 841–850. ACM, 2009.
- [76] R. Gross, J. Shi, and J.F. Cohn. *Quo vadis face recognition?* Citeseer, 2001.
- [77] Internet World Stats. Miniwatts Marketing Group. World internet users and population stats. <http://www.internetworldstats.com/stats.htm>, June 2011.
- [78] T. Gruter, M. Gruter, and C.C. Carbon. Neural and genetic foundations of face recognition and prosopagnosia. *Journal of Neuropsychology*, 2(1):79–97, 2008.
- [79] G. Guo, S.Z. Li, and K. Chan. Face recognition by support vector machines. In *Fourth IEEE International Conference on Automatic Face and Gesture Recognition*, pages 196–201. IEEE, 2000.
- [80] B. Heisele, P. Ho, and T. Poggio. Face recognition with support vector machines: Global versus component-based approach. In *Eighth IEEE International Conference on Computer Vision, ICCV 2001*, volume 2, pages 688–694. IEEE, 2001.
- [81] B. Heisele, P. Ho, J. Wu, and T. Poggio. Face recognition: component-based versus global approaches. *Computer Vision and Image Understanding*, 91(1):6–21, 2003.
- [82] M.E. Hoque, D.J. Russomanno, and M. Yeasin. 2d captchas from 3d models. In *SoutheastCon, 2006. Proceedings of the IEEE*, pages 165–170. IEEE, 2005.
- [83] D.H. House. Overview of three-dimensional computer graphics. *ACM Computing Surveys (CSUR)*, 28(1):145–148, 1996.
- [84] C.L. Huang and C.W. Chen. Human facial feature extraction for face interpretation and recognition. *Pattern recognition*, 25(12):1435–1444, 1992.
- [85] G. Humphrey. The psychology of the gestalt. *Journal of Educational Psychology*, 15(7):401, 1924.
- [86] NuCaptcha Inc. Nucaptcha security platform. <http://www.nucaptcha.com/>, 2010.
- [87] T. Kanade. *Picture processing system by computer complex and recognition of human faces*. PhD thesis, Dept. of Information Science, Kyoto University, 1973.
- [88] T. Kanade. *Computer recognition of human faces*, volume 47. Birkhäuser, 1977.

- [89] N. Kanwisher. The ventral visual object pathway in humans: evidence from fmri. *The visual neurosciences*, pages 1179–1189, 2003.
- [90] N. Kanwisher, J. McDermott, and M.M. Chun. The fusiform face area: a module in human extrastriate cortex specialized for face perception. *The Journal of Neuroscience*, 17(11):4302–4311, 1997.
- [91] Michael G. Kaplan. The 3-d captcha. <http://spamfizzle.com/CAPTCHA.aspx>, 2009.
- [92] E.J. Kartaltepe and S. Xi. Towards blocking outgoing malicious impostor emails. In *Proceedings of the 2006 International Symposium on a World of Wireless, Mobile and Multimedia Networks*, pages 5–pp. IEEE, 2006.
- [93] S. Karungaru, M. Fukumi, N. Akamatsu, and A. Takuya. Automatic human faces morphing using genetic algorithms based control points selection. *International Journal of Innovative Computing, Information and Control*, 3(2):1–6, 2007.
- [94] M. Kass, A. Witkin, and D. Terzopoulos. Snakes: Active contour models. *International journal of computer vision*, 1(4):321–331, 1988.
- [95] J.W. Kim, W.K. Chung, and H.G. Cho. A new image-based captcha using the orientation of the polygonally cropped sub-images. *The Visual Computer*, 26(6):1135–1143, 2010.
- [96] M. Kirby and L. Sirovich. Application of the karhunen-loeve procedure for the characterization of human faces. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 12(1):103–108, 1990.
- [97] R. Kjeltdsen and J. Kender. Finding skin in color images. In *Proceedings of the Second International Conference on Automatic Face and Gesture Recognition*, pages 312–317. IEEE, 1996.
- [98] K.A. Kluever and R. Zanibbi. Balancing usability and security in a video captcha. In *Proceedings of the 5th Symposium on Usable Privacy and Security*, page 14. ACM, 2009.
- [99] G. Kochanski, D. Lopresti, and C. Shih. A reverse turing test using speech. In *Seventh International Conference on Spoken Language Processing, ICSLP*, pages 1357–1360, 2002.
- [100] J.J. Koenderink. The structure of images. *Biological cybernetics*, 50(5):363–370, 1984.
- [101] K. Koffka. *Principles of Gestalt psychology*. New York, 1955.

- [102] A. Kolupaev and J. Ogijenko. Captchas: Humans vs. bots. *Security & Privacy, IEEE*, 6(1):68–70, 2008.
- [103] C.E. Kulkarni. Assocaptcha: designing human-friendly secure captchas using word associations. In *CHI '08, CHI Conference on Human Factors in Computing Systems*, pages 3705–3710. ACM, 2008.
- [104] R. Kumar, A. Banerjee, and B.C. Vemuri. Volterrafaces: Discriminant analysis using volterra kernels. In *IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2009*, pages 150–155. IEEE, 2009.
- [105] M. Lades, J.C. Vorbruggen, J. Buhmann, J. Lange, C. von der Malsburg, R.P. Wurtz, and W. Konen. Distortion invariant object recognition in the dynamic link architecture. *IEEE transactions on Computers*, 42(3):300–311, 1993.
- [106] A. Lanitis, C.J. Taylor, and T.F. Cootes. Automatic face identification system using flexible appearance models. *Image and Vision Computing*, 13(5):393–401, 1995.
- [107] S. Lawrence, C.L. Giles, A.C. Tsoi, and A.D. Back. Face recognition: A convolutional neural-network approach. *IEEE Transactions on Neural Networks*, 8(1):98–113, 1997.
- [108] A.W.F. Lee, D. Dobkin, W. Sweldens, and P. Schröder. Multiresolution mesh morphing. In *Proceedings of SIGGRAPH*, volume 99, pages 343–350, 1999.
- [109] S. Lehar. Gestalt isomorphism and the primacy of subjective conscious experience: A gestalt bubble model. *Behavioral and Brain Sciences*, 26(4):375–408, 2003.
- [110] TK Leung, MC Burl, and P. Perona. Finding faces in cluttered scenes using random labeled graph matching. In *Computer Vision, 1995. Proceedings., Fifth International Conference on*, pages 637–644. IEEE, 1995.
- [111] M.S. Lew. Information theoretic view-based and modular face detection. In *Proceedings of the Second International Conference on Automatic Face and Gesture Recognition*, pages 198–203. IEEE, 1996.
- [112] S.Z. Li and A.K. Jain. *Handbook of face recognition*. Citeseer, 2005.
- [113] S.Z. Li and J. Lu. Face recognition using the nearest feature line method. *IEEE Transactions on Neural Networks*, 10(2):439–443, 1999.
- [114] W.H. Liao. A captcha mechanism by exchange image blocks. In *18th International Conference on Pattern Recognition, ICPR 2006*, volume 1, pages 1179–1183. IEEE, 2006.

- [115] W.H. Liao and C.C. Chang. Embedding information within dynamic visual patterns. In *International Conference on Multimedia and Expo (ICME)*, volume 2, pages 895–898. IEEE, 2004.
- [116] S.H. Lin, S.Y. Kung, and L.J. Lin. Face recognition/detection by probabilistic decision-based neural network. *IEEE Transactions on Neural Networks*, 8(1):114–132, 1997.
- [117] T. Lindeberg. Scale-space theory: A basic tool for analyzing structures at different scales. *Journal of applied statistics*, 21(1-2):225–270, 1994.
- [118] D. Lopresti. Leveraging the captcha problem. *Human Interactive Proofs*, pages 31–45, 2005.
- [119] LoveToKnow. Define online marketing. <http://reference.yourdictionary.com/word-definitions/define-online-marketing.html>, April 2012.
- [120] D.G. Lowe. Distinctive image features from scale-invariant keypoints. *International journal of computer vision*, 60(2):91–110, 2004.
- [121] P. Lupkowski and M. Urbanski. Semcaptchauser-friendly alternative for ocr-based captcha systems. In *International Multiconference on Computer Science and Information Technology, IMCSIT 2008*, pages 325–329. IEEE, 2008.
- [122] MAAWG. Metrics report. http://www.maawg.org/email_metrics_report, 2011.
- [123] BS Manjunath, R. Chellappa, and C. von der Malsburg. A feature based approach to face recognition. In *Computer Vision and Pattern Recognition, 1992. Proceedings CVPR'92., 1992 IEEE Computer Society Conference on*, pages 373–378. IEEE, 1992.
- [124] P. Matthews and C.C. Zou. Scene tagging: image-based captcha using image composition and object relationships. In *Proceedings of the 5th ACM Symposium on Information, Computer and Communications Security*, pages 345–350. ACM, 2010.
- [125] S.J. McKenna, S. Gong, and Y. Raja. Modelling facial colour and identity with gaussian mixtures. *Pattern recognition*, 31(12):1883–1892, 1998.
- [126] G.J. McLachlan. Discriminant analysis and statistical pattern recognition. *Wiley Series in Probability and Mathematical Statistics*, 1, 1992.
- [127] D. Misra and K. Gaj. Face recognition captchas. In *International Conference on Internet and Web Applications and Services/Advanced, AICT-ICIW'06*, pages 122–122. IEEE, 2006.

- [128] B. Moghaddam, C. Nastar, and A. Pentland. Bayesian face recognition using deformable intensity surfaces. In *IEEE Computer Society Conference on Computer Vision and Pattern Recognition, CVPR'96*, pages 638–645. IEEE, 1996.
- [129] B. Moghaddam, W. Wahid, and A. Pentland. Beyond eigenfaces: Probabilistic matching for face recognition. In *Automatic Face and Gesture Recognition, 1998. Proceedings. Third IEEE International Conference on*, pages 30–35. IEEE, 2002.
- [130] G. Mori, S. Belongie, and J. Malik. Efficient shape matching using shape contexts. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 27(11):1832–1837, 2005.
- [131] G. Mori and J. Malik. Recognizing objects in adversarial clutter: Breaking a visual captcha. In *IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, volume 1, pages I–134. IEEE, 2003.
- [132] D. Morrison, S. Marchand-Maillet, and É. Bruno. Tagcaptcha: annotating images with captchas. In *Proceedings of the ACM SIGKDD Workshop on Human Computation*, pages 44–45. ACM, 2009.
- [133] G. Moy, N. Jones, C. Harkless, and R. Potter. Distortion estimation techniques in solving visual captchas. In *Proceedings of the 2004 IEEE Computer Society Conference on Computer Vision and Pattern Recognition, CVPR 2004*, volume 2, pages II–23. IEEE, 2004.
- [134] C. Namprempre and M.N. Dailey. Mitigating dictionary attacks with text-graphics character captchas. *IEICE TRANSACTIONS on Fundamentals of Electronics, Communications and Computer Sciences*, 90(1):179–186, 2007.
- [135] A.V. Nefian. Embedded bayesian networks for face recognition. In *IEEE International Conference on Multimedia and Expo, ICME'02*, volume 2, pages 133–136. IEEE, 2002.
- [136] A.V. Nefian and M.H. Hayes III. Hidden markov models for face recognition. In *Acoustics, Speech and Signal Processing, 1998. Proceedings of the 1998 IEEE International Conference on*, volume 5, pages 2721–2724. IEEE, 1998.
- [137] A.V. Nefian and M.H. Hayes III. Maximum likelihood training of the embedded hmm for face detection and recognition. In *International Conference on Image Processing*, volume 1, pages 33–36. IEEE, 2000.
- [138] C.A. Nelson. The development and neural bases of face recognition. *Infant and Child Development*, 10(1-2):3–18, 2001.

- [139] E. Osuna, R. Freund, and F. Girosit. Training support vector machines: an application to face detection. In *IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, pages 130–136. IEEE, 1997.
- [140] A.J. OToole, K.A. Deffenbacher, D. Valentin, and H. Abdi. Structural aspects of face recognition and the other-race effect. *Memory & Cognition*, 22(2):208–224, 1994.
- [141] P.S. Penev and J.J. Atick. Local feature analysis: A general statistical theory for object representation. *Network: computation in neural systems*, 7(3):477–500, 1996.
- [142] A. Pentland, B. Moghaddam, and T. Starner. View-based and modular eigenspaces for face recognition. In *IEEE Computer Society Conference on Computer Vision and Pattern Recognition, CVPR'94*, pages 84–91. IEEE, 1994.
- [143] P.J. Phillips, H. Moon, S.A. Rizvi, and P.J. Rauss. The FERET evaluation methodology for face-recognition algorithms. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 22(10):1090–1104, 2002.
- [144] A. Pinar Saygin, I. Cicekli, and V. Akman. Turing test: 50 years later. *Minds and Machines*, 10(4):463–518, 2000.
- [145] T. Porter and T. Duff. Compositing digital images. *ACM Siggraph Computer Graphics*, 18(3):253–259, 1984.
- [146] A. Raj, A. Jain, T. Pahwa, and A. Jain. Picture captchas with sequencing: Their types and analysis. *International Journal for Digital Society (IJDS)*, 1(3):208 – 220, 2010.
- [147] AN Rajagopalan, K.S. Kumar, J. Karlekar, R. Manivasakan, M.M. Patil, U.B. Desai, PG Poonacha, and S. Chaudhuri. Finding faces in photographs. In *Sixth International Conference on Computer Vision*, pages 640–645. IEEE, 1998.
- [148] J. Rehnman and A. Herlitz. Higher face recognition ability in girls: Magnified by own-sex and own-ethnicity bias. *Memory*, 14(3):289–296, 2006.
- [149] Security MVP Robert Moir. Defining malware: Faq. <http://technet.microsoft.com>, October 2003.
- [150] C. Romero Macias and E. Izquierdo. Visual word-based captcha using 3d characters. In *3rd International Conference on Crime Detection and Prevention (ICDP 2009)*, pages 1–5. IET, 2009.
- [151] C. Romero Macias and E. Izquierdo. Image captcha based on distorted faces. In *4th International Conference on Imaging for Crime Detection and Prevention (ICDP 2011)*,

- pages 1–6. IET, 2011.
- [152] S.A. Ross, J.A. Halderman, and A. Finkelstein. Sketcha: a captcha based on line drawings of 3d models. In *Proceedings of the 19th international conference on World wide web*, pages 821–830. ACM, 2010.
- [153] S.D. Roth. Ray casting for modeling solids. *Computer Graphics and Image Processing*, 18(2):109–144, 1982.
- [154] H.A. Rowley, S. Baluja, and T. Kanade. Neural network-based face detection. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 20(1):23–38, 2002.
- [155] Yong Rui and Zicheg Liu. Artificial: automated reverse turing test using facial features. In *Proceedings of the eleventh ACM international conference on Multimedia*, pages 295–298. ACM, 2003.
- [156] A. Rusu and V. Govindaraju. Handwritten captcha: Using the difference in the abilities of humans and machines in reading handwritten words. In *Ninth International Workshop on Frontiers in Handwriting Recognition (IWFHR-9)*, pages 226–231. IEEE, 2004.
- [157] Y.S. Ryu and S.Y. Oh. Automatic extraction of eye and mouth fields from a face image using eigenfeatures and multilayer perceptrons. *Pattern recognition*, 34(12):2459–2466, 2001.
- [158] V. Saalo. Novel captcha schemes. <http://www.cse.hut.fi/en/publications/B/11/>, 2010.
- [159] Microsoft Safety and Security Center. How to recognize phishing email messages, links, or phone calls. <http://www.microsoft.com/security/online-privacy/phishing-symptoms.aspx>, 2012.
- [160] S. Saklikar and S. Saha. Public key-embedded graphic captchas. In *5th IEEE Consumer Communications and Networking Conference (CCNC)*, pages 262–266. IEEE, 2008.
- [161] G. Sauer, H. Hochheiser, J. Feng, and J. Lazar. Towards a universally usable captcha. In *Proceedings of the Symposium on Accessible Privacy and Security, ACM Symposium On Usable Privacy and Security (SOUPS'08)*. ACM, 2008.
- [162] G. Sauer, J. Holman, J. Lazar, H. Hochheiser, and J. Feng. Accessible privacy and security: a universally usable human-interaction proof tool. *Universal Access in the Information Society*, 9(3):239–248, 2010.

- [163] P. Schmalfeldt and J.Kramlich. Humanauth. <http://sourceforge.net/projects/humanauth/>, 2007.
- [164] H. Schneiderman and T. Kanade. Probabilistic modeling of local appearance and spatial relationships for object recognition. In *IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, pages 45–51. IEEE, 1998.
- [165] N.A. Shah and M.T. Banday. Drag and drop image captcha. *Sprouts: Working Papers on Information Systems*, 8(46), 2008.
- [166] Y. Shirai. *Three-dimensional computer vision*. Springer-Verlag New York, Inc. New York, NY, USA, 1987.
- [167] M. Shirali-Shahreza. Captcha for children. In *IEEE SMC Third International Conference on System of Systems Engineering*, pages 1–6. Ieee, 2008.
- [168] M. Shirali-Shahreza and S. Shirali-Shahreza. Drawing captcha. In *28th International Conference on Information Technology Interfaces*, pages 475–480. IEEE, 2006.
- [169] M. Shirali-Shahreza and S. Shirali-Shahreza. Captcha for blind people. In *IEEE International Symposium on Signal Processing and Information Technology*, pages 995–998. IEEE, 2007.
- [170] M. Shirali-Shahreza and S. Shirali-Shahreza. Collage captcha. In *9th International Symposium on Signal Processing and Its Applications, ISSPA 2007*, pages 1–4. IEEE, 2007.
- [171] M. Shirali-Shahreza and S. Shirali-Shahreza. Passwordless login system for mobile phones using captcha. In *49th International Symposium ELMAR*, pages 243–246. IEEE, 2007.
- [172] M. Shirali-Shahreza and S. Shirali-Shahreza. Question-based captcha. In *International Conference on Computational Intelligence and Multimedia Applications*, volume 4, pages 54–58. IEEE, 2007.
- [173] M. Shirali-Shahreza and S. Shirali-Shahreza. Motion captcha. In *2008 Conference on Human System Interactions*, pages 1042–1044. IEEE, 2008.
- [174] M.H. Shirali-Shahreza and M. Shirali-Shahreza. Localized captcha for illiterate people. In *International Conference on Intelligent and Advanced Systems, ICIAS*, pages 675–679. IEEE, 2007.

- [175] S. Shirali-Shahreza and A. Movaghar. A new anti-spam protocol using captcha. In *IEEE International Conference on Networking, Sensing and Control*, pages 234–238. IEEE, 2007.
- [176] S. Shirali-Shahreza, M. Shirali-Shahreza, and A. Movaghar. Restricted access to exam grades on the web by hip. In *6th IEEE/ACIS International Conference on Computer and Information Science (ICIS)*, pages 967–971. IEEE, 2007.
- [177] L. Sirovich and M. Kirby. Low-dimensional procedure for the characterization of human faces. *Journal of the Optical Society of America A*, 4(3):519–524, 1987.
- [178] AE Slone, JB Brigham, and CA Meissner. Social and cognitive factors affecting the own-race advantage in white. *Basic and Applied Social Psychology*, 22:71–84, 2000.
- [179] K.K. Sung and T. Poggio. Example-based learning for view-based human face detection. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 20(1):39–51, 2002.
- [180] W. Susilo, Y.W. Chow, and H.Y. Zhou. Ste3d-cap: Stereoscopic 3d captcha. *Cryptology and Network Security*, pages 221–240, 2010.
- [181] J. Tam, J. Simsa, S. Hyde, and L. Von Ahn. Breaking audio captchas. *Advances in Neural Information Processing Systems*, 1(4), 2008.
- [182] M. Tariq Banday and N.A. Shah. A study of captchas for securing web services. *International Journal of Secure Digital Information Age IJSDIA*, 2011.
- [183] A. Thayananthan, B. Stenger, P.H.S. Torr, and R. Cipolla. Shape context and chamfer matching in cluttered scenes. In *Proceedings of the 2003 IEEE Computer Society Conference on Computer Vision and Pattern Recognition, CVPR 2003*, volume 1, pages I–127. IEEE, 2003.
- [184] Y. Tian, T. Kanade, and J.F. Cohn. Evaluation of gabor-wavelet-based facial action unit recognition in image sequences of increasing complexity. In *Automatic Face and Gesture Recognition, 2002. Proceedings. Fifth IEEE International Conference on*, pages 229–234. IEEE, 2002.
- [185] L. Torres. Is there any hope for face recognition? In *Proceedings of the 5th International Workshop on Image Analysis for Multimedia Interactive Services, WIAMIS*, volume 21, page 23, 2004.
- [186] M. Turk and A. Pentland. Eigenfaces for recognition. *Journal of cognitive neuroscience*, 3(1):71–86, 1991.

- [187] L. Velho, A.C. Frery, and J. Gomes. *Image processing for computer graphics and vision*. Springer-Verlag New York Inc, 2008.
- [188] L. Von Ahn, M. Blum, and J. Langford. Telling humans and computers apart automatically. *Communications of the ACM*, 47(2):56–60, 2004.
- [189] N.R. Wagner. Captchas and information hiding. <http://www.cs.utsa.edu/wagner/captcha/>, 2003.
- [190] P.M. Walker and J.W. Tanaka. An encoding advantage for own-race versus other-race faces. *Perception*, 32(9):1117–1126, 2003.
- [191] O. Warner. The cutest human-test: Kittenauth. <http://www.thepcspy.com/kittenauth>, 2006.
- [192] A. Watt. *Fundamentals of three-dimensional computer graphics*. Addison-Wesley Longman Publishing Co., Inc. Boston, MA, USA, 1990.
- [193] H. Wechsler. *Reliable face recognition methods: system design, implementation and evaluation*. Springer-Verlag New York Inc, 2007.
- [194] Eric W. Weisstein. Affine transformation. MathWorld—A Wolfram Web Resource, <http://mathworld.wolfram.com/AffineTransformation.html>, 1999.
- [195] A. Wettlaufer. *In the mind's eye: the visual impulse in Diderot, Baudelaire and Ruskin*. Rodopi, 2003.
- [196] J. Wilkins. Strong captcha guidelines v1. 2. Retrieved Nov, 10:2010, 2009.
- [197] L. Wiskott, J.M. Fellous, N. Kuiger, and C. von der Malsburg. Face recognition by elastic bunch graph matching. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 19(7):775–779, 1997.
- [198] L. Wiskott and C. Malsburg. Recognizing faces by dynamic link matching. *Neuroimage*, 4(3):S14–S18, 1996.
- [199] G. Wolberg. Image morphing: a survey. *The Visual Computer*, 14(8):360–372, 1998.
- [200] G. Wolberg, Institute of Electrical, and Electronics Engineers. Computer Society. *Digital image warping*, volume 10662. IEEE computer society press California, 1990.
- [201] S. Wold, K. Esbensen, and P. Geladi. Principal component analysis. *Chemometrics and intelligent laboratory systems*, 2(1):37–52, 1987.

- [202] P. Ximenes, A. dos Santos, M. Fernandez, and J. Celestino. A captcha in the text domain. In *On the Move to Meaningful Internet Systems 2006: OTM 2006 Workshops*, pages 605–615. Springer, 2006.
- [203] T. Yamamoto, T. Suzuki, and M. Nishigaki. A proposal of four-panel cartoon captcha: The concept. In *13th International Conference on Network-Based Information Systems (NBIS)*, pages 575–578. IEEE, 2010.
- [204] R.V. Yampolskiy. Detecting and controlling cheating in online poker. In *5th IEEE Consumer Communications and Networking Conference (CCNC)*, pages 848–853. IEEE, 2008.
- [205] J. Yan and A.S. El Ahmad. Breaking visual captchas with naive pattern recognition algorithms. In *Twenty-Third Annual Computer Security Applications Conference (ACSAC)*, pages 279–291. IEEE, 2007.
- [206] J. Yan and A.S. El Ahmad. A low-cost attack on a microsoft captcha. In *Proceedings of the 15th ACM conference on Computer and Communications Security*, pages 543–554. ACM, 2008.
- [207] J. Yan and A.S. El Ahmad. Usability of captchas or usability issues in captcha design. In *Proceedings of the 4th symposium on Usable Privacy and Security*, pages 44–52. ACM, 2008.
- [208] G. Yang and T.S. Huang. Human face detection in a complex background. *Pattern recognition*, 27(1):53–63, 1994.
- [209] J. Yang and A. Waibel. A real-time face tracker. In *Proceedings 3rd IEEE Workshop on Applications of Computer Vision, WACV'96.*, pages 142–147. IEEE, 1996.
- [210] M.H. Yang, D.J. Kriegman, and N. Ahuja. Detecting faces in images: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 24(1):34–58, 2002.
- [211] M.H. Yang, D. Roth, and N. Ahuja. A snow-based face detector. In *Advances in Neural Information Processing Systems 12*. Citeseer, 2000.
- [212] G. Yovel and N. Kanwisher. Face perception:: Domain specific, not process specific. *Neuron*, 44(5):889–898, 2004.
- [213] K.C. Yow and R. Cipolla. Feature-based human face detection. *Image and Vision Computing*, 15(9):713–735, 1997.

- [214] A.L. Yuille, P.W. Hallinan, and D.S. Cohen. Feature extraction from faces using deformable templates. *International journal of computer vision*, 8(2):99–111, 1992.
- [215] W. Zhao, R. Chellappa, and A. Krishnaswamy. Discriminant analysis of principal components for face recognition. In *Third IEEE International Conference on Automatic Face and Gesture Recognition*, pages 336–341. IEEE, 1998.
- [216] W. Zhao, R. Chellappa, P.J. Phillips, and A. Rosenfeld. Face recognition: A literature survey. *Acm Computing Surveys (CSUR)*, 35(4):399–458, 2003.
- [217] W. Zhao and Md.). Computer Vision Laboratory University of Maryland (College Park). *Robust image based 3D face recognition*. Computer Vision Laboratory, Center for Automation Research, University of Maryland, 2000.
- [218] B.B. Zhu, J. Yan, Q. Li, C. Yang, J. Liu, N. Xu, M. Yi, and K. Cai. Attacks and design of image recognition captchas. In *Proceedings of the 17th ACM conference on Computer and communications security*, pages 187–200. ACM, 2010.

Publications

- [1] E.Izquierdo K.Vaiapury, C.Romero Macias. A new integrated methodology for 3d discrepancy checking and measurement in assembly. This is a article for 3DTVCON 2012., 2012.
- [2] C. Romero Macias and E. Izquierdo. Visual word-based captcha using 3d characters. In *3rd International Conference on Crime Detection and Prevention (ICDP 2009)*, pages 1–5. IET, 2009.
- [3] C. Romero Macias and E. Izquierdo. Image captcha based on distorted faces. In *4th International Conference on Imaging for Crime Detection and Prevention (ICDP 2011)*, pages 1–6. IET, 2011.
- [4] C. Romero Macias and E. Izquierdo. A survey of captchas: Are computers getting the better of us? This is a journal for ACM Surveys., 2011.

References

- [5] AltaVista. Altavista's "add-url" site, protected by the earliest known captcha. <http://altavista.com/sites/addurl/newurl>, 1997.
- [6] N. Arad, N. Dyn, D. Reisfeld, and Y. Yeshurun. Image warping by radial basis functions: Application to facial expressions. *CVGIP-Graphical Models and Image Processing*, 56(2):161–172, 1994.
- [7] E. Bagherian and R.W.O.K. Rahmat. Facial feature extraction for face recognition: a review. In *International Symposium on Information Technology, ITSIM 2008*, volume 2, pages 1–9. IEEE, 2008.
- [8] H.S. BAIRD and J.L. BENTLEY. Implicit captchas. In *SPIE proceedings series*, pages 191–196. Society of Photo-Optical Instrumentation Engineers, 2005.
- [9] H.S. Baird and D.P. Lopresti. *Human interactive proofs: second international workshop, HIP 2005, Bethlehem, PA, USA, May 19-20, 2005: proceedings*, volume 3517. Springer Verlag, May 2005.
- [10] H.S. Baird, M.A. Moll, and S.Y. Wang. Scattertype: A legible but hard-to-segment captcha. In *Eighth International Conference on Document Analysis and Recognition*, pages 935–939. IEEE, 2005.

- [11] H.S. Baird and K. Popat. Human interactive proofs and document image analysis. In *Proceedings of the 5th International Workshop on Document Analysis Systems V*, pages 507–518. Springer-Verlag, 2002.
- [12] M.S. Bartlett, J.R. Movellan, and T.J. Sejnowski. Face recognition by independent component analysis. *IEEE Transactions on Neural Networks*, 13(6):1450–1464, 2002.
- [13] R. Beede. Analysis of recaptcha effectiveness. http://www.rodneybeede.com/reCAPTCHA_weakened.html, 2010.
- [14] T. Beier and S. Neely. Feature-based image metamorphosis. *Computer Graphics*, 26(2):35–42, 1992.
- [15] P.N. Belhumeur, J.P. Hespanha, and D.J. Kriegman. Eigenfaces vs. fisherfaces: Recognition using class specific linear projection. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 19(7):711–720, 1997.
- [16] R. Bergmair and S. Katzenbeisser. Towards human interactive proofs in the text-domain. *Information Security*, pages 257–267, 2004.
- [17] Mrak M., Sprljan N., Izquierdo E., "Motion estimation in temporal subbands for quality scalable motion coding", *IET Elect. Letters*, Volume 41, Issue 19, Pages 1050-1051
- [18] Mrówka E., Dorado A., Pedrycz W., Izquierdo E., "Dimensionality Reduction for Content-Based Image Classification", *IEEE Proceedings 8th International Conference on Information Visualisation*, London, England, 14-16 July 2004, Pages 435-438
- [19] Dorado A., Izquierdo E., "Semantic Labeling of Images Combining Color, Texture and Keywords", *IEEE Proceedings 10th International Conference on Image Processing (ICIP 2003)*, Barcelona, Catalonia, 14-18 September 2003, Pages 9-12
- [20] Izquierdo E., "Using Invariant Image Features for Synchronization in Spread Spectrum Image Watermarking", *EURASIP J. on Advances in Signal Processing*, Issue 4
- [21] Dong L., Izquierdo E., "A Biologically Inspired System for Classification of Natural Images", *IEEE Transactions on Circuits and Systems for Video Technology*, Volume 17, Issue 5, Pages 590-603
- [22] Mrak M., Abhayaratne C., Izquierdo E., "On the influence of motion vector precision limiting in scalable video coding", *IEEE Proceedings 7th International Conference on Signal Processing*, Beijing, September 2004, Volume 2, Pages 1143-1146
- [23] Essid S., Izquierdo E., et al., "A multi-modal dance corpus for research into interaction between humans in virtual environments", *Springer Journal on Multimodal User Interfaces*, Volume 7, Issue 1-2, Pages 157-17.

- [24] M. Brown and D.G. Lowe. Invariant features from interest point groups. In *British Machine Vision Conference*, pages 656–665. British Machine Vision Association, 2002.
- [25] V. Bruce, P.R. Green, and M.A. Georgeson. *Visual perception*. Psychology Press, 1996.
- [26] V. Bruce and A. Young. Understanding face recognition. *British journal of psychology*, 77(3):305–327, 1986.
- [27] R. Brunelli and T. Poggio. Face recognition: Features versus templates. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 15(10):1042–1052, 2002.
- [28] E. Bursztein, R. Beauxis, H. Paskov, D. Perito, C. Fabry, and J. Mitchell. The failure of noise-based non-continuous audio captchas. In *IEEE Symposium on Security and Privacy (SP)*, pages 19–31. IEEE, 2011.
- [29] E. Bursztein and S. Bethard. Decaptcha: breaking 75% of ebay audio captchas. In *Proceedings of the 3rd USENIX conference on Offensive technologies*, pages 8–8. USENIX Association, 2009.
- [30] E. Bursztein, S. Bethard, C. Fabry, J.C. Mitchell, and D. Jurafsky. How good are humans at solving captchas? a large scale evaluation. In *2010 IEEE Symposium on Security and Privacy*, pages 399–413. IEEE, 2010.
- [31] E. Bursztein, M. Martin, and J. Mitchell. Text-based captcha strengths and weaknesses. In *Proceedings of the 18th ACM conference on Computer and communications security*, pages 125–138. ACM, 2011.
- [32] P. Campadelli, R. Lanzarotti, and G. Lipori. Automatic facial feature extraction for face recognition. *Face Recognition*, pages 31–58, 2007.
- [33] S. Chakrabarti and M. Singbal. Password-based authentication: Preventing dictionary attacks. *IEEE Computer*, 40(6):68–74, 2007.
- [34] T.Y. Chan. Using a test-to-speech synthesizer to generate a reverse turing test. In *Tools with Artificial Intelligence, 2003. Proceedings. 15th IEEE International Conference on*, pages 226–232. IEEE, 2003.
- [35] M. Chandrasekaran, R. Chinchani, and S. Upadhyaya. Phoney: Mimicking user response to detect phishing attacks. In *Proceedings of the 2006 International Symposium on a World of Wireless, Mobile and Multimedia Networks*, pages 668–672. IEEE, 2006.

- [36] Praks P., Grzegorzec M., Moravec R., Válek L., Izquierdo E., "Wavelet and Eigen-Space Feature Extraction for Classification of Metallography Images", *IOS Press 17th European-Japanese Conference on Information Modelling and Knowledge Bases XIX (EJC 2007)*, Pori, Finland, 4-7 June 2007, Pages 190-199
- [37] Zhang Q., Izquierdo E., "Optimizing Metrics Combining Low-Level Visual Descriptors for Image Annotation and Retrieval", *IEEE 31st International Conference on Acoustics, Speech, and Signal Processing*, Toulouse, France, 14-19 May 2006, Volume 2, Pages 405-408
- [38] Piatrik T., Izquierdo E., "Image classification using an ant colony optimization approach", *Springer First International Conference on Semantics and Digital Media Technologies, SAMT 2006*, Athens, Greece, December 6-8 2006, Pages 159-168
- [39] Izquierdo E., Ghanbari M., "Nonlinear Gaussian filtering approach for object segmentation", *IET Proceedings - Vision, Image and Signal Processing*, Vol. 146, Issue 3, Pages 137-143
- [40] Izquierdo E., Feng X., "Modeling Arbitrary Objects Based on Geometric Surface Conformity", *IEEE Transactions on Circuits and Systems for Video Technology*, Volume 9, Issue 2, Pages 336-352
- [41] Shanableh T., Peixoto E., Izquierdo E., "MPEG-2 to HEVC video transcoding with content-based modeling", *IEEE Transactions on Circuits and Systems for Video Technology*, Issue 99, Pages 1-7
- [42] Tsomko E., Kim H., Izquierdo E., "Linear Gaussian blur evolution for detection of blurry images", *IET Image Processing*, Volume 4, Issue 4, Pages 302-312
- [43] M. Chew and J. Tygar. Collaborative filtering captchas. *Human Interactive Proofs*, pages 95–110, 2005.
- [44] A.L. Coates, H.S. Baird, and RJ Faternan. Pessimist print: a reverse Turing test. In *Sixth International Conference on Document Analysis and Recognition. Proceedings.*, pages 1154–1158. IEEE, 2001.
- [45] T. Cootes, G. Edwards, and C. Taylor. Active appearance models. *Computer Vision ECCV98*, pages 484–498, 1998.
- [46] I.J. Cox, J. Ghosn, and P.N. Yianilos. Feature-based face recognition using mixture-distance. In *Computer Vision and Pattern Recognition, 1996. Proceedings CVPR'96, 1996 IEEE Computer Society Conference on*, pages 209–216. IEEE, 1996.
- [47] I. Craw, D. Tock, and A. Bennett. Finding face features. In *Computer Vision ECCV'92*, pages 92–96. Springer, 1992.
- [48] Athanasiadis T., Izquierdo E., et al. "Integrating Image Segmentation and Classification for Fuzzy Knowledge-Based Multimedia Indexing", *Springer 15th International Multimedia Modeling Conference*, France, 7-9 Jan. 2009, Pages 263-274

- [49] Chandramouli K., Stewart C., Brailsford T., Izquierdo E., "CAE-L: An Ontology Modelling Cultural Behaviour in Adaptive Education", *IEEE Third International Workshop on Semantic Media Adaptation and Personalization*, Prague, 2008
- [50] Praks P., Kucera R., Izquierdo E., "The sparse image representation for automated image retrieval", *15th IEEE International Conference on Image Processing (ICIP 2008)*. San Diego, CA, 12-15 October 2008, Pages 25-28
- [51] Pinheiro A., Izquierdo E., Ghanhari M., "Shape Matching using a Curvature Based Polygonal Approximation in Scale-Space", *IEEE Proceedings International Conference on Image Processing*, Vancouver, Sept. 2000, Volume 2, Pages 538-541
- [52] Dorado A., Izquierdo E., "Semi-Automatic Image Annotation Using Frequent Keyword Mining", *IEEE Proceedings 7th International Conference on Information Visualisation (IV 2003)*. London, England, 16-18 July 2003, Pages 532-535
- [53] Wang Y., Izquierdo E., "High-Capacity Data Hiding in MPEG-2 Compressed Video", *9th International Workshop on Systems, Signals and Image Processing (IWSSIP 2002)*, World Scientific, Manchester, England, 7-8 November 2002, Pages 212-218
- [54] R. Dhamija and A. Perrig. Dj vu: A user study using images for authentication. In *Proceedings of the 9th conference on USENIX Security Symposium-Volume 9*, pages 4–4. USENIX Association, 2000.
- [55] R. Doyle. Image-based captcha with jaci. <http://ryandoyle.net/devel/jaci/>, 2009.
- [56] W Ellis. A source book of gestalt psychology. *A source book of Gestalt psychology*, pages 71–88, 1938.
- [57] J. Elson, J.R. Douceur, J. Howell, and J. Saul. Asirra: a captcha that exploits interest-aligned manual image categorization. In *In Proceedings of ACM CCS*, pages 331–334. ACM, 2007.
- [58] K. Etemad and R. Chellappa. Discriminant analysis for recognition of human face images. *Journal of the Optical Society of America A, JOS A*, 14(8):1724–1733, 1997.
- [59] Dorado A., Izquierdo E., "Fuzzy Color Signatures", *IEEE Proceedings International Conference on Image Processing*, New York, 22-25 Sep. 2002, Vol. 1, Pages 433-436
- [60] Peixoto E., Izquierdo E., "A Complexity-scalable Transcoder from H.264/AVC to the New HEVC Codec", *IEEE Proceedings 19th International Conference on Image Processing (ICIP 2012)*, Orlando, 30 September - 3 October 2012, Pages 737-740

- [61] Borges P., Mayer J., Izquierdo E., "Robust and Transparent Color Modulation for Text Data Hiding", *IEEE Transactions on Multimedia*, Volume 10, Issue 8, Pages 1479-1489
- [62] Zgaljic T., Sprljan N., Izquierdo E., "Bitstream Syntax Description based Adaptation of Scalable Video", *2nd European Workshop on the Integration of Knowledge, Semantics and Digital Media Technology*, London, England, 30 November - 1 December 2005
- [63] Borges P., Mayer J., Izquierdo E., "Efficient visual fire detection applied for video retrieval", *European Signal Processing Conference*, Lausanne, Switzerland, 2008
- [64] Izquierdo E., Ernst M., "Motion/Disparity analysis for 3D-Video-Conference Applications", *1995 International Workshop on Stereoscopy and 3-Dimensional Imaging (IWS3DI 1995)*. Santorini, Greece, September 1995
- [65] Kay S., Izquierdo E., "Robust Content Based Image Watermarking", 3rd Workshop on Image Analysis for Multimedia Interactive Services (WIAMIS 2001), Tampere, Finland, 16-17 May 2001, Pages 53-56 [66]
- [66] Y. Gao and M.K.H. Leung. Face recognition using line edge map. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 24(6):764–779, 2002.
- [67] I. Gauthier and M.J. Tarr. Becoming a "Greeble" expert: exploring mechanisms for face recognition. *Vision Research*, 37(12):1673–1682, 1997.
- [68] P.B. Godfrey. Text-based captcha algorithms. 2002.
- [69] A.J. Goldstein, L.D. Harmon, and A.B. Lesk. Identification of human faces. *Proceedings of the IEEE*, 59(5):748–760, 2005.
- [70] P. Golle. Machine learning attacks against the asirra captcha. In *Proceedings of the 15th ACM conference on Computer and communications security*, pages 535–542. ACM, 2008.
- [71] P. Golle and N. Ducheneaut. Preventing bots from playing online games. *Computers in Entertainment (CIE)*, 3(3):3–3, 2005.
- [72] J. Gomes. *Warping and morphing of graphical objects*, volume 1. Morgan Kaufmann, 1999.
- [73] J.T. Goodman and R. Rounthwaite. Stopping outgoing spam. In *Proceedings of the 5th ACM conference on Electronic Commerce*, pages 30–39. ACM, 2004.
- [74] C.M. Goral, K.E. Torrance, D.P. Greenberg, and B. Battaile. Modeling the interaction of light between diffuse surfaces. In *ACM SIGGRAPH Computer Graphics*, volume 18,

- pages 213–222. ACM, 1984.
- [75] R. Gossweiler, M. Kamvar, and S. Baluja. What’s up captcha?: a captcha based on image orientation. In *Proceedings of the 18th international conference on World wide web*, pages 841–850. ACM, 2009.
- [76] R. Gross, J. Shi, and J.F. Cohn. *Quo vadis face recognition?* Citeseer, 2001.
- [77] Internet World Stats. Miniwatts Marketing Group. World internet users and population stats. <http://www.internetworldstats.com/stats.htm>, June 2011.
- [78] T. Gruter, M. Gruter, and C.C. Carbon. Neural and genetic foundations of face recognition and prosopagnosia. *Journal of Neuropsychology*, 2(1):79–97, 2008.
- [79] G. Guo, S.Z. Li, and K. Chan. Face recognition by support vector machines. In *Fourth IEEE International Conference on Automatic Face and Gesture Recognition*, pages 196–201. IEEE, 2000.
- [80] B. Heisele, P. Ho, and T. Poggio. Face recognition with support vector machines: Global versus component-based approach. In *Eighth IEEE International Conference on Computer Vision, ICCV 2001*, volume 2, pages 688–694. IEEE, 2001.
- [81] B. Heisele, P. Ho, J. Wu, and T. Poggio. Face recognition: component-based versus global approaches. *Computer Vision and Image Understanding*, 91(1):6–21, 2003.
- [82] M.E. Hoque, D.J. Russomanno, and M. Yeasin. 2d captchas from 3d models. In *South-eastCon, 2006. Proceedings of the IEEE*, pages 165–170. IEEE, 2005.
- [83] D.H. House. Overview of three-dimensional computer graphics. *ACM Computing Surveys (CSUR)*, 28(1):145–148, 1996.
- [84] C.L. Huang and C.W. Chen. Human facial feature extraction for face interpretation and recognition. *Pattern recognition*, 25(12):1435–1444, 1992.
- [85] G. Humphrey. The psychology of the gestalt. *Journal of Educational Psychology*, 15(7):401, 1924.
- [86] NuCaptcha Inc. Nucaptcha security platform. <http://www.nucaptcha.com/>, 2010.
- [87] T. Kanade. *Picture processing system by computer complex and recognition of human faces*. PhD thesis, Dept. of Information Science, Kyoto University, 1973.
- [88] T. Kanade. *Computer recognition of human faces*, volume 47. Birkhäuser, 1977.

- [89] N. Kanwisher. The ventral visual object pathway in humans: evidence from fmri. *The visual neurosciences*, pages 1179–1189, 2003.
- [90] N. Kanwisher, J. McDermott, and M.M. Chun. The fusiform face area: a module in human extrastriate cortex specialized for face perception. *The Journal of Neuroscience*, 17(11):4302–4311, 1997.
- [91] Michael G. Kaplan. The 3-dcaptcha. <http://spamfizzle.com/CAPTCHA.aspx>, 2009.
- [92] E.J. Kartaltepe and S. Xi. Towards blocking outgoing malicious impostor emails. In *Proceedings of the 2006 International Symposium on a World of Wireless, Mobile and Multimedia Networks*, pages 5–pp. IEEE, 2006.
- [93] S. Karungaru, M. Fukumi, N. Akamatsu, and A. Takuya. Automatic human faces morphing using genetic algorithms based control points selection. *International Journal of Innovative Computing, Information and Control*, 3(2):1–6, 2007.
- [94] M. Kass, A. Witkin, and D. Terzopoulos. Snakes: Active contour models. *International journal of computer vision*, 1(4):321–331, 1988.
- [95] J.W. Kim, W.K. Chung, and H.G. Cho. A new image-based captcha using the orientation of the polygonally cropped sub-images. *The Visual Computer*, 26(6):1135–1143, 2010.
- [96] M. Kirby and L. Sirovich. Application of the karhunen-loeve procedure for the characterization of human faces. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 12(1):103–108, 1990.
- [97] R. Kjeltdsen and J. Kender. Finding skin in color images. In *Proceedings of the Second International Conference on Automatic Face and Gesture Recognition*, pages 312–317. IEEE, 1996.
- [98] K.A. Kluever and R. Zanibbi. Balancing usability and security in a video captcha. In *Proceedings of the 5th Symposium on Usable Privacy and Security*, page 14. ACM, 2009.
- [99] G. Kochanski, D. Lopresti, and C. Shih. A reverse turing test using speech. In *Seventh International Conference on Spoken Language Processing, ICSLP*, pages 1357–1360, 2002.
- [100] J.J. Koenderink. The structure of images. *Biological cybernetics*, 50(5):363–370, 1984.
- [101] K. Koffka. *Principles of Gestalt psychology*. New York, 1955.

- [102] Calic J., Izquierdo E., "Temporal Segmentation of MPEG Video Streams", *EURASIP Journal on Applied Signal Processing*, Issue 6, Pages 561—565, 2002/6/26
- [103] Izquierdo E., Casas J., Leonardi R., Migliorati P., O'Connor N., Kompatsiaris I., Strintzis M., "Advanced Content-Based Semantic Scene Analysis and Information Retrieval: The Schema Project", *4th European Workshop on Image Analysis for Multimedia Interactive Services (WIAMIS 2003)*, World Scientific Publishing, London, England, 9-11 April 2003, Pages 519-528
- [104] Chandramouli K., Izquierdo E., "Image Classification using Self-Organising Feature Map and Particle Swarm Optimisation", *7th International Workshop on Image Analysis for Multimedia Interactive Services (WIAMIS 2006)*. Incheon, Korea, 19-21 April 2006, Pages 313-316
- [105] Izquierdo E., Ghanbari M., "Key Components for an Advanced Segmentation System", *IEEE Transactions on Multimedia*, Volume 4, Issue 1, Pages 97-113
- [106] Zhang Q., Izquierdo E., "A Multi-Feature Optimization Approach to Object-Based Image Classification", *5th International Conference Image and Video Retrieval (CIVR 2006)*. Tempe, Arizona, 13-15 July 2006, Pages 310—319
- [107] Kliegr T., Chandramouli K., Nemrava J., Svatek V., Izquierdo E., "Combining Image Captions and Visual Analysis for Image Concept Classification", *9th International Workshop on Multimedia Data Mining*", Las Vegas, 2008, Pages 817
- [108] Calic J., Izquierdo E., "A Multiresolution Technique for Video Indexing and Retrieval", *2002 International Conference on Image Processing (ICIP 2002)*, Rochester, NY, September 22-25, 2002, Volume 1, Pages 952—955
- [109] Ramzan N., Wan S., Izquierdo E., "Joint Source-Channel Coding for Wavelet-Based Scalable Video Transmission Using an Adaptive Turbo Code", *EURASIP Journal on Image and Video Processing*, Volume 2007, Pages 1-12
- [110] Zgaljic T., Sprljan N., Izquierdo E., "Bit-stream allocation methods for scalable video coding supporting wireless communications", *Signal Processing: Image Communication*, Volume 22, Issue 3, Pages 298-316
- [111] Calic J., Sav S., Izquierdo E., Marlow S., Murphy N., O'Connor N., "Temporal Video Segmentation For Real-Time Key Frame Extraction", *27th IEEE International Conference on Acoustics, Speech, and Signal Processing (ICASSP 2002)*. Orlando, FL, 13-17 May 2002, Volume 4, Pages 3632-3635
- [112] Ramos J., Guil N., González J., Zapata E., Izquierdo E., "Logotype detection to support semantic-based video annotation", *Journal Signal Processing: Image Communication*, Volume 22, Issue 7-8, Pages 669-679

- [113] Seneviratne L., Izquierdo E., “An Interactive Framework for Image Annotation through Gaming”, *11th ACM international conference on Multimedia Information Retrieval (MIR 2010)*. Philadelphia, Pennsylvania, 29-31 March 2010, Pages 517-526
- [114] Calic J., Izquierdo E., "Towards Real-Time Shot Detection in the MPEG Compressed Domain", *3rd Workshop on Image Analysis for Multimedia Interactive Services (WIAMIS 2001)*, Tampere, Finland, 16-17 May 2001, Pages 1-5
- [115] Lee J., Simone. F., Ebrahimi T., Ramzan N., Izquierdo E., "Quality assessment of multidimensional video scalability", *IEEE Communications Magazine*, Volume 50, Issue 4, Pages 38-46
- [116] Hanke M., Izquierdo E., März R., "On Asymptotics in Case of Linear Index-2 Differential-Algebraic Equations", *SIAM Journal on Numerical Analysis* 1998, Volume 35, Issue 4, Pages 1326-1346
- [117] Wan S., Izquierdo E., “Rate-distortion optimized motion-compensated prediction for packet loss resilient video coding”, *Image Processing, IEEE Transactions on*, Volume 16, Issue 5, Pages 1327-1338
- [118] Chandramouli K., Kliegr T., Nemrava J., Svatek V., Izquierdo E., “Query Refinement and User Relevance Feedback for Contextualized Image Retrieval”, *5th International Conference on Visual Information Engineering (VIE 2008)*. Xi'an, China, 29 July - 1 August 2008, Pages 453—458
- [119] Zhang Q., Izquierdo E., “Combining Low-Level Features for Semantic Inference in Image Retrieval”, *Journal on Advances in Signal Processing*, 2007/4
- [120] Izquierdo E., Guerra V., "An Ill-Posed Operator for Secure Image Authentication", *IEEE Transactions on Circuits and Systems for Video Technology*, Volume 13, Issue 8, Pages 842-852
- [121] O'Connor N., Izquierdo E., et al, "Region and Object Segmentation Algorithms in the Qimera Segmentation Platform", *3rd International Workshop on Content-Based Multimedia Indexing (CBMI 2003)*, Rennes, France, 22-24 September 2003, Pages 1-8
- [122] Mrak M., Sprljan N., Zgaljic T., Ramzan N., Wan S., Izquierdo E., "Performance evidence of software proposal for Wavelet Video Coding Exploration group", *Conference 76th MPEG Meeting*, 2006/4/7
- [123] Izquierdo E., Kruse S., "Image Analysis for 3D Modeling, Rendering, and Virtual View Generation", *Elsevier Journal Computer Vision and Image Understanding*, 1998, Volume 71, Issue 2, Pages 231-253
- [124] Sprljan N., Mrak M., Abhayaratne C., Izquierdo E., "A Scalable Coding Framework for Efficient Video Adaptation", *6th International Workshop on Image Analysis for*

- Multimedia Interactive Services*, Switzerland, 2005, 13-15 April 2005, Pages 1-4
- [125] Wilkins P., Izquierdo E., et al., "K-Space at TRECVID 2006", *4th TRECVID Workshop (TRECVID 2006)*. Gaithersburg, Maryland, 13-14 November 2006
- [126] Izquierdo E., Ohm J., "Image-based rendering and 3D modeling: a complete framework", *Signal Processing: Image Communication*, Volume 15, Issue 10, 2000
- [127] Chandramouli K., Izquierdo E., "Image Classification using Chaotic Particle Swarm Optimization", *13th IEEE International Conference on Image Processing (ICIP 2006)*, Atlanta, Georgia, 8-11 October 2006, Pages 3001-3004
- [128] Ramzan N., Park H., Izquierdo E., "Video streaming over P2P networks: Challenges and opportunities", *Elsevier Journal Signal Processing: Image Communication*, Volume 27, Issue 5, Pages 401-411
- [129] Lee J., Izquierdo E., et al., "Subjective evaluation of scalable video coding for content distribution", *18th ACM International Conference on Multimedia*, Italy, 2010
- [130] Ramzan N., Izquierdo E., et al., "Peer-to-peer streaming of scalable video in future Internet applications", *IEEE Communications Magazine*, Vol 49, Issue 3, Pp 128-135
- [131] Izquierdo E., "Stereo Image Analysis for Multi-viewpoint Telepresence Applications", *Elsevier Journal Signal Processing: Image Communication*, Volume 11, Issue 3
- [132] D. Morrison, S. Marchand-Maillet, and E. Bruno. Tagcaptcha: annotating images with captchas, *Proc. of the ACM SIGKDD Workshop on Human Computation*, 2009
- [133] G. Moy, N. Jones, C. Harkless, and R. Potter. Distortion estimation techniques in solving visual captchas. In *Proceedings of the 2004 IEEE Computer Society Conference on Computer Vision and Pattern Recognition, CVPR 2004*, Vol. 2, IEEE, 2004
- [134] C. Namprempe and M.N. Dailey. Mitigating dictionary attacks with text-graphics character captchas. *IEICE TRANSACTIONS on Fundamentals of Electronics, Communications and Computer Sciences*, 90(1):179–186, 2007
- [135] A.V. Nefian. Embedded bayesian networks for face recognition. In *IEEE International Conference on Multimedia and Expo, ICME'02*, volume 2, pages 133–136. IEEE, 2002.
- [136] A.V. Nefian and M.H. Hayes III. Hidden markov models for face recognition. In *Acoustics, Speech and Signal Processing, 1998. Proceedings of the 1998 IEEE International Conference on*, volume 5, pages 2721–2724. IEEE, 1998.
- [137] A.V. Nefian and M.H. Hayes III. Maximum likelihood training of the embedded hmm for face detection and recognition. *ICIP*, volume 1, pages 33–36. IEEE, 2000.
- [138] C.A. Nelson. The development and neural bases of face recognition. *Infant and Child Development*, 10(1-2):3–18, 2001.

- [139] E. Osuna, R. Freund, and F. Girosit. Training support vector machines: an application to face detection. In *IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, pages 130–136. IEEE, 1997.
- [140] A.J. OToole, K.A. Deffenbacher, D. Valentin, and H. Abdi. Structural aspects of face recognition and the other-race effect. *Memory & Cognition*, 22(2):208–224, 1994.
- [141] P.S. Penev and J.J. Atick. Local feature analysis: A general statistical theory for object representation. *Network: computation in neural systems*, 7(3):477–500, 1996.
- [142] A. Pentland, B. Moghaddam, and T. Starner. View-based and modular eigenspaces for face recognition. In *IEEE Computer Society Conference on Computer Vision and Pattern Recognition, CVPR'94*, pages 84–91. IEEE, 1994.
- [143] P.J. Phillips, H. Moon, S.A. Rizvi, and P.J. Rauss. The FERET evaluation methodology for face-recognition algorithms. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 22(10):1090–1104, 2002.
- [144] A. Pinar Saygin, I. Cicekli, and V. Akman. Turing test: 50 years later. *Minds and Machines*, 10(4):463–518, 2000.
- [145] T. Porter and T. Duff. Compositing digital images. *ACM Siggraph Computer Graphics*, 18(3):253–259, 1984.
- [146] A. Raj, A. Jain, T. Pahwa, and A. Jain. Picture captchas with sequencing: Their types and analysis. *International Journal for Digital Society (IJDS)*, 1(3):208 – 220, 2010.
- [147] AN Rajagopalan, K.S. Kumar, J. Karlekar, R. Manivasakan, M.M. Patil, U.B. Desai, PG Poonacha, and S. Chaudhuri. Finding faces in photographs. In *Sixth International Conference on Computer Vision*, pages 640–645. IEEE, 1998.
- [148] J. Rehnman and A. Herlitz. Higher face recognition ability in girls: Magnified by own-sex and own-ethnicity bias. *Memory*, 14(3):289–296, 2006.
- [149] Security MVP Robert Moir. Defining malware: Faq. <http://technet.microsoft.com>, October 2003.
- [150] C. Romero Macias and E. Izquierdo. Visual word-based captcha using 3d characters. In *3rd International Conference on Crime Detection and Prevention (ICDP 2009)*, pages 1–5. IET, 2009.
- [151] C. Romero Macias and E. Izquierdo. Image captcha based on distorted faces. In *4th International Conference on Imaging for Crime Detection and Prevention (ICDP 2011)*,

- pages 1–6. IET, 2011.
- [152] S.A. Ross, J.A. Halderman, and A. Finkelstein. Sketcha: a captcha based on line drawings of 3d models. In *Proceedings of the 19th international conference on World wide web*, pages 821–830. ACM, 2010.
- [153] S.D. Roth. Ray casting for modeling solids. *Computer Graphics and Image Processing*, 18(2):109–144, 1982.
- [154] H.A. Rowley, S. Baluja, and T. Kanade. Neural network-based face detection. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 20(1):23–38, 2002.
- [155] Yong Rui and Zicheg Liu. Artificial: automated reverse turing test using facial features. In *Proceedings of the eleventh ACM international conference on Multimedia*, pages 295–298. ACM, 2003.
- [156] A. Rusu and V. Govindaraju. Handwritten captcha: Using the difference in the abilities of humans and machines in reading handwritten words. In *Ninth International Workshop on Frontiers in Handwriting Recognition (IWFHR-9)*, pages 226–231. IEEE, 2004.
- [157] Y.S. Ryu and S.Y. Oh. Automatic extraction of eye and mouth fields from a face image using eigenfeatures and multilayer perceptrons. *Pattern recognition*, 34(12):2459–2466, 2001.
- [158] V.Saalo. Novel captcha schemes. <http://www.cse.hut.fi/en/publications/B/11/>, 2010.
- [159] Microsoft Safety and Security Center. How to recognize phishing email messages, links, or phone calls. <http://www.microsoft.com/security/online-privacy/phishing-symptoms.aspx>, 2012.
- [160] S. Saklikar and S. Saha. Public key-embedded graphic captchas. In *5th IEEE Consumer Communications and Networking Conference (CCNC)*, pages 262–266. IEEE, 2008.
- [161] G. Sauer, H. Hochheiser, J. Feng, and J. Lazar. Towards a universally usable captcha. In *Proceedings of the Symposium on Accessible Privacy and Security, ACM Symposium On Usable Privacy and Security (SOUPS'08)*. ACM, 2008.
- [162] G. Sauer, J. Holman, J. Lazar, H. Hochheiser, and J. Feng. Accessible privacy and security: a universally usable human-interaction proof tool. *Universal Access in the Information Society*, 9(3):239–248, 2010.

- [163] P. Schmalfeldt and J.Kramlich. Humanauth. <http://sourceforge.net/projects/humanauth/>, 2007.
- [164] H. Schneiderman and T. Kanade. Probabilistic modeling of local appearance and spatial relationships for object recognition. In *IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, pages 45–51. IEEE, 1998.
- [165] N.A. Shah and M.T. Banday. Drag and drop image captcha. *Sprouts: Working Papers on Information Systems*, 8(46), 2008.
- [166] Y. Shirai. *Three-dimensional computer vision*. Springer-Verlag New York, Inc. New York, NY, USA, 1987.
- [167] M. Shirali-Shahreza. Captcha for children. In *IEEE SMC Third International Conference on System of Systems Engineering*, pages 1–6. Ieee, 2008.
- [168] M. Shirali-Shahreza and S. Shirali-Shahreza. Drawing captcha. In *28th International Conference on Information Technology Interfaces*, pages 475–480. IEEE, 2006.
- [169] M. Shirali-Shahreza and S. Shirali-Shahreza. Captcha for blind people. In *IEEE International Symposium on Signal Processing and Information Technology*, pages 995–998. IEEE, 2007.
- [170] M. Shirali-Shahreza and S. Shirali-Shahreza. Collage captcha. In *9th International Symposium on Signal Processing and Its Applications, ISSPA 2007*, pages 1–4. IEEE, 2007.
- [171] M. Shirali-Shahreza and S. Shirali-Shahreza. Passwordless login system for mobile phones using captcha. In *49th International Symposium ELMAR*, pages 243–246. IEEE, 2007.
- [172] M. Shirali-Shahreza and S. Shirali-Shahreza. Question-based captcha. In *International Conference on Computational Intelligence and Multimedia Applications*, volume 4, pages 54–58. IEEE, 2007.
- [173] M. Shirali-Shahreza and S. Shirali-Shahreza. Motion captcha. In *2008 Conference on Human System Interactions*, pages 1042–1044. IEEE, 2008.
- [174] M.H. Shirali-Shahreza and M. Shirali-Shahreza. Localized captcha for illiterate people. In *International Conference on Intelligent and Advanced Systems, ICIAS*, pages 675–679. IEEE, 2007.

- [175] S. Shirali-Shahreza and A. Movaghar. A new anti-spam protocol using captcha. In *IEEE International Conference on Networking, Sensing and Control*, pages 234–238. IEEE, 2007.
- [176] S. Shirali-Shahreza, M. Shirali-Shahreza, and A. Movaghar. Restricted access to exam grades on the web by hip. In *6th IEEE/ACIS International Conference on Computer and Information Science (ICIS)*, pages 967–971. IEEE, 2007.
- [177] L. Sirovich and M. Kirby. Low-dimensional procedure for the characterization of human faces. *Journal of the Optical Society of America A*, 4(3):519–524, 1987.
- [178] AE Slone, JB Brigham, and CA Meissner. Social and cognitive factors affecting the own-race advantage in white. *Basic and Applied Social Psychology*, 22:71–84, 2000.
- [179] K.K. Sung and T. Poggio. Example-based learning for view-based human face detection. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 20(1):39–51, 2002.
- [180] W. Susilo, Y.W. Chow, and H.Y. Zhou. Ste3d-cap: Stereoscopic 3d captcha. *Cryptology and Network Security*, pages 221–240, 2010.
- [181] J. Tam, J. Simsa, S. Hyde, and L. Von Ahn. Breaking audio captchas. *Advances in Neural Information Processing Systems*, 1(4), 2008.
- [182] M. Tariq Banday and N.A. Shah. A study of captchas for securing web services. *International Journal of Secure Digital Information Age IJSDIA*, 2011.
- [183] A. Thayananthan, B. Stenger, P.H.S. Torr, and R. Cipolla. Shape context and chamfer matching in cluttered scenes. In *Proceedings of the 2003 IEEE Computer Society Conference on Computer Vision and Pattern Recognition, CVPR 2003*, volume 1, pages I–127. IEEE, 2003.
- [184] Y. Tian, T. Kanade, and J.F. Cohn. Evaluation of gabor-wavelet-based facial action unit recognition in image sequences of increasing complexity. In *Automatic Face and Gesture Recognition, 2002. Proceedings. Fifth IEEE International Conference on*, pages 229–234. IEEE, 2002.
- [185] L. Torres. Is there any hope for face recognition? In *Proceedings of the 5th International Workshop on Image Analysis for Multimedia Interactive Services, WIAMIS*, volume 21, page 23, 2004.
- [186] M. Turk and A. Pentland. Eigenfaces for recognition. *Journal of cognitive neuroscience*, 3(1):71–86, 1991.

- [187] L. Velho, A.C. Frery, and J. Gomes. *Image processing for computer graphics and vision*. Springer-Verlag New York Inc, 2008.
- [188] L. Von Ahn, M. Blum, and J. Langford. Telling humans and computers apart automatically. *Communications of the ACM*, 47(2):56–60, 2004.
- [189] N.R. Wagner. Captchas and information hiding. <http://www.cs.utsa.edu/wagner/captcha/>, 2003.
- [190] P.M. Walker and J.W. Tanaka. An encoding advantage for own-race versus other-race faces. *Perception*, 32(9):1117–1126, 2003.
- [191] O. Warner. The cutest human-test: Kittenauth. <http://www.thepeccspy.com/kittenauth>, 2006.
- [192] A. Watt. *Fundamentals of three-dimensional computer graphics*. Addison-Wesley Longman Publishing Co., Inc. Boston, MA, USA, 1990.
- [193] H. Wechsler. *Reliable face recognition methods: system design, implementation and evaluation*. Springer-Verlag New York Inc, 2007.
- [194] Eric W. Weisstein. Affine transformation. MathWorld—A Wolfram Web Resource, <http://mathworld.wolfram.com/AffineTransformation.html>, 1999.
- [195] A. Wettlaufer. *In the mind's eye: the visual impulse in Diderot, Baudelaire and Ruskin*. Rodopi, 2003.
- [196] J. Wilkins. Strong captcha guidelines v1. 2. Retrieved Nov, 10:2010, 2009.
- [197] L. Wiskott, J.M. Fellous, N. Kuiger, and C. von der Malsburg. Face recognition by elastic bunch graph matching. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 19(7):775–779, 1997.
- [198] L. Wiskott and C. Malsburg. Recognizing faces by dynamic link matching. *Neuroimage*, 4(3):S14–S18, 1996.
- [199] G. Wolberg. Image morphing: a survey. *The Visual Computer*, 14(8):360–372, 1998.
- [200] G. Wolberg, Institute of Electrical, and Electronics Engineers. Computer Society. *Digital image warping*, volume 10662. IEEE computer society press California, 1990.
- [201] S. Wold, K. Esbensen, and P. Geladi. Principal component analysis. *Chemometrics and intelligent laboratory systems*, 2(1):37–52, 1987.

- [202] P. Ximenes, A. dos Santos, M. Fernandez, and J. Celestino. A captcha in the text domain. In *On the Move to Meaningful Internet Systems 2006: OTM 2006 Workshops*, pages 605–615. Springer, 2006.
- [203] T. Yamamoto, T. Suzuki, and M. Nishigaki. A proposal of four-panel cartoon captcha: The concept. In *13th International Conference on Network-Based Information Systems (NBIS)*, pages 575–578. IEEE, 2010.
- [204] R.V. Yampolskiy. Detecting and controlling cheating in online poker. In *5th IEEE Consumer Communications and Networking Conference (CCNC)*, pages 848–853. IEEE, 2008.
- [205] J. Yan and A.S. El Ahmad. Breaking visual captchas with naive pattern recognition algorithms. In *Twenty-Third Annual Computer Security Applications Conference (ACSAC)*, pages 279–291. IEEE, 2007.
- [206] J. Yan and A.S. El Ahmad. A low-cost attack on a microsoft captcha. In *Proceedings of the 15th ACM conference on Computer and Communications Security*, pages 543–554. ACM, 2008.
- [207] J. Yan and A.S. El Ahmad. Usability of captchas or usability issues in captcha design. In *Proceedings of the 4th symposium on Usable Privacy and Security*, pages 44–52. ACM, 2008.
- [208] G. Yang and T.S. Huang. Human face detection in a complex background. *Pattern recognition*, 27(1):53–63, 1994.
- [209] J. Yang and A. Waibel. A real-time face tracker. In *Proceedings 3rd IEEE Workshop on Applications of Computer Vision, WACV'96.*, pages 142–147. IEEE, 1996.
- [210] M.H. Yang, D.J. Kriegman, and N. Ahuja. Detecting faces in images: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 24(1):34–58, 2002.
- [211] M.H. Yang, D. Roth, and N. Ahuja. A snow-based face detector. In *Advances in Neural Information Processing Systems 12*. Citeseer, 2000.
- [212] G. Yovel and N. Kanwisher. Face perception:: Domain specific, not process specific. *Neuron*, 44(5):889–898, 2004.
- [213] K.C. Yow and R. Cipolla. Feature-based human face detection. *Image and Vision Computing*, 15(9):713–735, 1997.

- [214] A.L. Yuille, P.W. Hallinan, and D.S. Cohen. Feature extraction from faces using deformable templates. *International journal of computer vision*, 8(2):99–111, 1992.
- [215] W. Zhao, R. Chellappa, and A. Krishnaswamy. Discriminant analysis of principal components for face recognition. In *Third IEEE International Conference on Automatic Face and Gesture Recognition*, pages 336–341. IEEE, 1998.
- [216] W. Zhao, R. Chellappa, P.J. Phillips, and A. Rosenfeld. Face recognition: A literature survey. *Acm Computing Surveys (CSUR)*, 35(4):399–458, 2003.
- [217] W. Zhao and Md.). Computer Vision Laboratory University of Maryland (College Park). *Robust image based 3D face recognition*. Computer Vision Laboratory, Center for Automation Research, University of Maryland, 2000.
- [218] B.B. Zhu, J. Yan, Q. Li, C. Yang, J. Liu, N. Xu, M. Yi, and K. Cai. Attacks and design of image recognition captchas. In *Proceedings of the 17th ACM conference on Computer and communications security*, pages 187–200. ACM, 2010.